# Europäisches Patentamt European Patent Office Office européen des brevets

(11) **EP 1 291 679 A1** 

(12)

# **EUROPEAN PATENT APPLICATION** published in accordance with Art. 158(3) EPC

(43) Date of publication: 12.03.2003 Bulletin 2003/11

(21) Application number: 01934387.0

(22) Date of filing: 29.05.2001

(51) Int Cl.7: G02B 1/04

(86) International application number: PCT/JP01/04491

(87) International publication number: WO 01/092925 (06.12.2001 Gazette 2001/49)

(84) Designated Contracting States:
AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE TR

(30) Priority: **31.05.2000 JP 2000161348 07.12.2000 JP 2000372499** 

(71) Applicant: Mitsui Chemicals, Inc. Tokyo 100-6070 (JP)

(72) Inventors:

 FUJIYAMA, Takahiro Sodegaura-shi, Chiba 299-0265 (JP)  HAMA, Hideo Sodegaura-shi, Chiba 299-0265 (JP)

 OTSUJI, Atsuo Sodegaura-shi, Chiba 299-0265 (JP)

 TAKUMA, Keisuke Chiyoda-ku, Tokyo 100-6070 (JP)

(74) Representative: Stuart, Ian Alexander et al MEWBURN ELLIS York House 23 Kingsway London WC2B 6HP (GB)

# (54) OPTICAL MATERIAL AND OPTICAL PART EACH CONTAINING AROMATIC SULFIDE COMPOUND AND AROMATIC SULFIDE COMPOUND

(57) Optical materials with improved heat resistance, especially dopant-type GI POFs with improved heat resistance are provided. These optical materials each comprises at least one aromatic sulfide compound represented by the following formula (1):

$$A - \left( -S - B^{k} \right)_{n} \tag{1}$$

wherein

n stands for an integer of from 2 to 12, k stands for an integer of from 1 to n,

A represents a substituted or unsubstituted, n-valent carbocyclic aromatic ring or heterocyclic aromatic ring, and

B¹ to B¹ each independently represent a substituted or unsubstituted, carbocyclic aromatic group or heterocyclic aromatic group.

#### Description

5

20

25

30

35

40

45

50

#### **TECHNICAL FIELD**

[0001] This invention relates to optical materials and optical parts, which make use of aromatic sulfide compounds, and also to the aromatic sulfide compounds. Especially, the present invention is concerned with polymer optical fibers.

#### **BACKGROUND ART**

[0002] As optical material, glass has been used traditionally. In recent years, however, transparent polymer materials have begun to find wide-spread utility. In particular, they are used in fields such as optical lens, optical disks, optical fibers, rod lenses, optical waveguides, optical switches, and optical pickup lenses. Optical polymer materials have been developed in pursuit of higher functions such as higher transparency, higher refractive index, lower dispersion, lower birefringence and higher heat resistance. Among these, polymer optical fibers (POFs) are attracting increasing importance in the next generation communication network conception such as LAN (local area network) and ISDN (integrated service ' digital network).

**[0003]** In POF, a core part and a cladding part are both formed of a polymer. Compared with silica glass optical fibers, POFs permit easier processing and handling and require less costly materials. POFs are, therefore, widely used as optical transmission lines for such short distances that transmission losses cause no practical problem.

[0004] Step index (SI) POFs in each of which the refractive index distribution varies stepwise have already been put into practical use for transmission over a short distance of 50 m or so, but are not suited for optical communications due to small transmission capacity. On the other hand, grated index (GI) POFs in each of which the refractive index distribution varies in a radial direction are greater in transmission capacity than SI POFs and are suited for optical communications, and the smoother the refractive index distribution, the greater the transmission capacity of a fiber.

[0005] As manufacturing processes of GI POFs, there are two types of processes. One of these two types of processes is of the dopant type such as that disclosed, for example, in WO93/08488. According to the dopant-type process, a refractive index distribution is obtained by adding, to a matrix polymer, a low molecular weight compound having no reactivity to the polymer and causing the low molecular weight compound to diffuse such that a concentration gradient is formed. The other is of the copolymerization type disclosed, for example, in JP 5-173025 A or JP 5-173026 A. According to this copolymerization-type process, a refractive index distribution is obtained by forming a concentration gradient while making use of a difference in reactivity between two monomers upon copolymerization of these monomers.

[0006] However, the copolymerization-type process can hardly avoid occurrence of a microscopic non-uniform structure due to differences in the copolymerized composition and tends to develop a problem in transparency by the microscopic non-uniform structure. Accordingly, the transmission distance available under the current situation is limited to about 50 m, so that transmission distances required for domestic LAN and the like cannot be fully met. The dopant-type process, on the other hand, can provide extremely high transparency to wavelengths as the size of the dopant is on the order of several Å, but involves a problem in heat resistance. When used under an atmosphere the temperature of which is higher than a certain temperature, the distribution of the dopant tends to vary, leading to a problem that the refractive index distribution tends to vary and the heat stability of the refractive index distribution is inferior.

[0007] This problem can be attributed to a reduction in the glass transition temperature of the core material by the plasticization effect of the dopant. The glass transition temperature of PMMA which has been used in conventional POFs is around 105°C. When a dopant is added, the glass transition temperature drops to around room temperature. For example, benzyl benzoate, benzyl-n-butyl phthalate, benzyl salicylate, bromobenzene, benzyl phenyl ether, diphenyl phthalate, diphenylmethane, diphenyl ether, diphenyl sulfide, phenyl benzoate, triphenyl phosphate, tricresyl phosphate and the like are known as dopants for GI POFs. Among these, diphenyl sulfide is disclosed to bring about both plasticizing effect and higher refractive index in JP-A 11-142657. Nonetheless, even use of this dopant is still unable to fully satisfy the heat resistance.

#### DISCLOSURE OF THE INVENTION

**[0008]** The present invention has been completed with the foregoing circumstances in view and has as an object the provision of an aromatic sulfide compound useful for an optical material. More specifically, an object of the present invention is to provide a dopant-type GI POF improved in heat resistance.

[0009] The present inventors have devoted themselves to 'the solution of the above-described problems, and have found that use of an aromatic sulfide of a particular structure as a dopant for an optical material makes it possible to inhibit a reduction in the glass transition temperature of a core material, to improve the heat resistance and hence to permit using under an atmosphere of a temperature higher than a certain temperature, leading to the completion of

the present invention.

[0010] The present invention, therefore, provides:

[1] An optical material comprising at least one aromatic sulfide compound represented by the following formula (1):

$$A - \left(-S - B^{k}\right)_{n} \tag{1}$$

wherein

5

10

15

20

25

30

35

40

45

50

55

n stands for an integer of from 2 to 12,

k stands for an integer of from 1 to n,

A represents a substituted or unsubstituted, n-valent carbocyclic aromatic ring or heterocyclic aromatic ring, and

B¹ to B¹ each independently represent a substituted or unsubstituted, carbocyclic aromatic group or heterocyclic aromatic group.

[2] An optical material as described above under [1], wherein in formula (1), n stands for an integer of from 2 to 4, and A is a substituted or unsubstituted, heterocyclic aromatic ring.

[3] An optical material as described above under [2], wherein in formula (1), B¹ to Bⁿ each independently are a substituted or unsubstituted phenyl group, a substituted or unsubstituted pyrimidyl group, a substituted or unsubstituted or unsubstituted or unsubstituted or unsubstituted benzothiazolyl group, a substituted or unsubstituted benzothiazolyl group, a substituted or unsubstituted benzoxazolyl group, a substituted or unsubstituted thiadiazolyl group, or a substituted or unsubstituted thiazolyl group.

[4] An optical material as described above under [2], wherein in formula (1), A is a divalent heterocyclic aromatic ring selected from a substituted or unsubstituted thiophene ring, a substituted or unsubstituted thiophene-1,1-dioxide ring, a substituted or unsubstituted thiophenethiadiazole ring, a substituted or unsubstituted thiophene ring, a substituted or unsubstituted triazine ring, or a substituted or unsubstituted pyrimidine ring.

[5] An optical material as described above under [4], wherein in formula (1), B¹ to Bⁿ each independently are a substituted or unsubstituted phenyl group, a substituted or unsubstituted pyrimidyl group, a substituted or unsubstituted or unsubstituted or unsubstituted or unsubstituted benzothiazolyl group, a substituted or unsubstituted benzothiazolyl group, a substituted or unsubstituted benzothiazolyl group, or a substituted or unsubstituted thiazolyl group.

[6] An optical material as described above under [2], wherein in formula (1), A is a trivalent heterocyclic aromatic ring selected from a substituted or unsubstituted thiophene ring, a substituted or unsubstituted triazine ring, or a substituted or unsubstituted pyrimidine ring.

[7] An optical material as described above under [6], wherein in formula (1), B¹ to Bⁿ each independently are a substituted or unsubstituted phenyl group, a substituted or unsubstituted pyrimidyl group, a substituted or unsubstituted or unsubstituted or unsubstituted or unsubstituted or unsubstituted benzothiazolyl group, a substituted or unsubstituted benzoxazolyl group, a substituted thiadiazolyl group, or a substituted or unsubstituted thiazolyl group.

[8] An optical material as described above under [2], wherein in formula (1), A is a tetravalent heterocyclic aromatic ring selected from a substituted or unsubstituted thiophene ring or a substituted or unsubstituted thiophene ring.

[9] An optical material as described above under [8], wherein in formula (1), B¹ to Bⁿ each independently are a substituted or unsubstituted phenyl group, a substituted or unsubstituted pyrimidyl group, a substituted or unsubstituted or unsubstituted or unsubstituted or unsubstituted or unsubstituted benzothiazolyl group, a substituted or unsubstituted benzoxazolyl group, a substituted thiadiazolyl group, or a substituted or unsubstituted thiazolyl group.

[10] An optical material as described above under [1], wherein in formula (1), n stands for an integer of from 2 to 6, and A is a substituted or unsubstituted, carbocyclic aromatic ring.

[11] An optical material as described above under [10], wherein in formula (1), B¹ to Bⁿ each independently are a substituted or unsubstituted phenyl group, a substituted or unsubstituted pyrimidyl group, a substituted or unsubstituted or unsubstituted or unsubstituted benzothiazolyl group, a substituted or unsubstituted benzoxazolyl group, a substituted thiadiazolyl group, or a substituted or unsubstituted thiazolyl group.

[12] An optical material as described above under [10], wherein in formula (1). A is a divalent carbocyclic aromatic

ring selected from a substituted or unsubstituted benzene ring, a substituted or unsubstituted naphthalene ring, a substituted or unsubstituted fluorene ring, or a substituted or unsubstituted biphenyl group.

[13] An optical material as described above under [12], wherein in formula (1), B¹ to Bⁿ each independently are a substituted or unsubstituted phenyl group, a substituted or unsubstituted pyrimidyl group, a substituted or unsubstituted or unsubstituted or unsubstituted or unsubstituted benzothiazolyl group, a substituted or unsubstituted benzothiazolyl group, a substituted or unsubstituted benzothiazolyl group, or a substituted or unsubstituted thiazolyl group.

[14] An optical material as described above under [10], wherein in formula (1), A is a trivalent carbocyclic aromatic ring selected from a substituted or unsubstituted benzene ring or a substituted or unsubstituted fluorene ring.

[15] An optical material as described above under [14], wherein in formula (1), B¹ to Bⁿ each independently are a substituted or unsubstituted phenyl group, a substituted or unsubstituted pyrimidyl group, a substituted or unsubstituted or unsubstituted or unsubstituted or unsubstituted or unsubstituted benzothiazolyl group, a substituted or unsubstituted benzothiazolyl group, a substituted or unsubstituted benzoxazolyl group, a substituted thiadiazolyl group, or a substituted or unsubstituted thiazolyl group.

[16] An optical material as described above under [10], wherein in formula (1), A is a tetravalent carbocyclic aromatic ring selected from a substituted or unsubstituted benzene ring or a substituted or unsubstituted biphenyl group. [17] An optical material as described above under [16], wherein in formula (1), B¹ to Bⁿ each independently are a substituted or unsubstituted phenyl group, a substituted or unsubstituted pyrimidyl group, a substituted or unsubstituted or unsubstituted or unsubstituted benzothiazolyl group, a substituted or unsubstituted benzothiazolyl group, a substituted or unsubstituted benzoxazolyl group, a substituted thiadiazolyl group, or a substituted or unsubstituted thiazolyl group.

[18] An optical material as described above under [1] to [17], which is a polymer optical fiber material.

[19] An optical material as described above under [1] to [17], which is formed in a polymer optical fiber.

[20] An optical material as described above under [1] to [17], which is formed in a GI polymer optical fiber.

[21] An aromatic sulfide compound represented by the following formula (1a):

$$A - \left(-S - B^{k}\right)_{2}$$
 (1a)

wherein

5

10

15

20

25

30

35

40

45

50

55

k stands for an integer of from 1 to 2,

A represents a divalent carbocyclic aromatic ring or heterocyclic aromatic ring selected from a substituted or unsubstituted benzene ring, a substituted or unsubstituted naphthalene ring, a substituted or unsubstituted fluorene ring, a substituted or unsubstituted biphenyl ring, a substituted or unsubstituted thiophene ring, a substituted or unsubstituted thiophene-1,1-dioxide ring, a substituted or unsubstituted thiophene-1,1-dioxide ring, a substituted or unsubstituted triazine ring, or a substituted or unsubstituted pyrimidine ring, and

 $B^1$  and  $B^2$  each independently represent a carbocyclic aromatic group or heterocyclic aromatic group selected from a substituted or unsubstituted phenyl group, a substituted or unsubstituted pyrimidyl group, a substituted or unsubstituted pyrimidyl group, a substituted or unsubstituted benzothiazolyl group, a substituted or unsubstituted benzoxazolyl group, a substituted or unsubstituted thiazolyl group, or a substituted or unsubstituted thiazolyl group.

[22] An aromatic sulfide compound represented by the following formula (1b):

$$A - \left( -S - B^{k} \right)_{3} \tag{1b}$$

wherein

k stands for an integer of from 1 to 3,

A represents a trivalent carbocyclic aromatic ring or heterocyclic aromatic ring selected from a substituted or unsubstituted benzene ring, a substituted or unsubstituted fluorene ring, a substituted or unsubstituted triazine ring, or a substituted or unsubstituted pyrimidine ring, and

B<sup>1</sup>, B<sup>2</sup> and B<sup>3</sup> each independently represent a carbocyclic aromatic group or heterocyclic aromatic group selected from a substituted or unsubstituted phenyl group, a substituted or unsubstituted pyrimidyl group, a substituted or unsubstituted or unsubstituted or unsubstituted or unsubstituted benzothiazolyl group, a substituted or unsubstituted benzoxazolyl group, a substituted thiadiazolyl group, or a substituted or unsubstituted thiazolyl group.

[23] An aromatic sulfide compound represented by the following formula (1c):

10

20

25

30

40

45

5

$$A - \left( -S - B^{k} \right)_{4}$$
 (1c)

15 wherein

k stands for an integer of from 1 to 4,

A represents a carbocyclic aromatic ring or heterocyclic aromatic ring selected from a substituted or unsubstituted benzene ring, a substituted or unsubstituted biphenyl ring, a substituted or unsubstituted thiophene ring, a substituted or unsubstituted thieno[3,2-b]thiophene ring, and

B<sup>1</sup>, B<sup>2</sup> and B<sup>4</sup> each independently represent a carbocyclic aromatic group or heterocyclic aromatic group selected from a substituted or unsubstituted phenyl group, a substituted or unsubstituted pyrimidyl group, a substituted or unsubstituted naphthyl group, a substituted or unsubstituted thienyl group, a substituted or unsubstituted benzothiazolyl group, a substituted or unsubstituted benzoxazolyl group, a substituted thiadiazolyl group, or a substituted or unsubstituted thiazolyl group.

#### **BRIEF DESCRIPTION OF THE DRAWINGS**

[0011]

FIG. 1 is a graph showing variations in the refractive indexes of spin-coated films depending upon variations in the concentrations of dopants as measured in Example 8 and Comparative Example 1; and

FIG. 2 is a graph showing relationships between 'glass transition temperature and refractive index as measured in Example 15 and Comparative Example 2.

#### 35 BEST MODES FOR CARRYING OUT THE INVENTION

[0012] The present invention will hereinafter be described in detail.

[0013] The optical material according to the present invention is characterized by comprising:

- (a) a transparent polymer, and
- (b) an aromatic sulfide compound.

[0014] The optical material according to the present invention is characterized by comprising at least one aromatic sulfide compound represented by the following formula (1):

 $A - \left( -S - B^{k} \right)_{n} \tag{1}$ 

50

55

wherein

n stands for an integer of from 2 to 12,

k stands for an integer of from 1 to n,

A represents a substituted or unsubstituted, n-valent carbocyclic aromatic ring or heterocyclic aromatic ring, and B<sup>1</sup> to B<sup>n</sup> each independently represent a substituted or unsubstituted, carbocyclic aromatic group or heterocyclic aromatic group.

[0015] A description will firstly be made about A in formula (1), which forms a central skeleton.

[0016] In the heterocyclic aromatic ring, the aromatic ring is composed of atoms of two or more elements. Illustrative

of the atoms of two or more elements are carbon atom, oxygen atom, phosphorus atom, sulfur atom, and nitrogen atom. The aromatic ring may preferably be composed of atoms of 2 to 5 types of elements, with atoms of 2 to 4 types of elements being more preferred. It is to be noted that atoms other than carbon atom will be referred to as "hetero atoms".

[0017] The heterocyclic aromatic ring may be composed of either a 5-membered ring or a 6-membered ring. The heterocyclic aromatic ring may preferably be composed of a single ring or 2 to 4 aromatic rings fused together, with a single ring or 2 to 3 aromatic rings fused together being more preferred.

[0018] The number of carbons contained in the heterocyclic aromatic ring may preferably be 4 to 14, with 4 to 11 being more preferred.

10 [0019] More preferred specific examples of the heterocyclic aromatic ring will be described.

5

15

20

25

30


55

**[0020]** Firstly, 5-membered rings each of which are represented by the following formula (2) and contain one hetero atom can be mentioned. Illustrative of formula (2) are furan ring (Z=O), thiophene ring (Z=S) and pyrrole ring (Z=NH). Among these, preferred are thiophene ring and furan ring, and more preferred is thiophene ring.

 $\left\langle \begin{array}{c} \\ \\ \\ \end{array} \right\rangle$  (2)

[0021] Further, the following formula (3) with a benzene ring fused with formula (2) can be mentioned. Illustrative of formula (3) are indole ring (Z=NH), benzofuran ring (Z=O) and benzothiophene ring (Z=S).

[0022] In addition, the following formulas (4a) to (4f) with aromatic rings fused with a thiophene ring of formula (2) in which Z=S can also be mentioned. Among these, preferred are isothianaphthene ring, thienothiadiazole ring and thieno[3,2-b]thiophene ring, and more preferred are thienothiadiazole ring and thieno[3,2-b]thiophene ring.

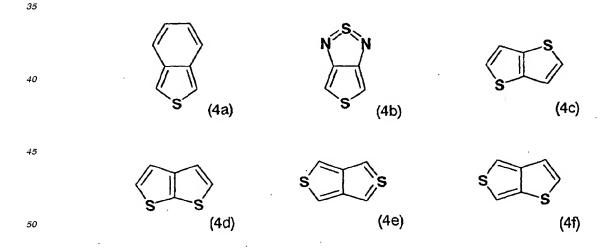

**[0023]** Next, 5-membered rings each of which are represented by the following formula (5a) or (5b) and contain two hetero atoms can be mentioned. Illustrative of formula (5a) are oxazole ring ( $Z^1$ =O), thiazole ring ( $Z^1$ =S) and imidazole ring ( $Z^1$ =NH). Illustrative of formula (5b) are isoxazole ring ( $Z^2$ =O), isothiazole ring ( $Z^2$ =S) and pyrazole ring ( $Z^2$ =NH}. Among these, oxazole ring and thiazole ring are preferred, with thiazole ring being more preferred.



5

10

15

20

25

30


40

45

50

55

**[0024]** Further, the following general formula (6a) or (6b) with a benzene ring fused with the 5-membered ring of formula (5a) or (5b) can be mentioned. Illustrative of formula (6a) are benzoxazole ring ( $Z^1$ =O), benzothiazole ring ( $Z^1$ =S) and benzimidazole ring ( $Z^1$ =NH). Illustrative of formula (6b) are benzisoxazole ring ( $Z^2$ =O), benzisothiazole ring ( $Z^2$ =S) and benzopyrazole ring ( $Z^2$ =NH).




[0025] Examples of 5-membered rings each of which contains 3 or more hetero atoms include n-triazole ring, s-triazole ring, 1,2,4-oxadiazole ring, 1,3,5-oxadiazole ring, 1,2,5-oxadiazole ring, 1,2,4-thiadiazole ring, 1,3,5-thiadiazole ring, 1,2,5-thiadiazole ring and tetrazole ring. Among these, preferred are 1,3,5-oxadiazole ring and 1,3,5-thiadiazole ring, with 1,3,5-thiadiazole ring being more preferred.

[0026] As a 6-membered ring which contains one hetero atom, pyridine ring can be mentioned. In addition, quinoline ring and isoquinoline ring each of which contains a pyridine ring and a benzene ring fused therewith can also be mentioned.

**[0027]** Next, examples of 6-membered rings each of which contains two hetero atoms include pyridazine ring, pyrimidine ring and pyrazine ring. Benzo[d]pyridazine ring, benzo[c]pyridazine ring, quinazoline ring and quinoxaline can also be mentioned, each of which is composed of such a 6-membered ring and a benzene ring fused therewith.

[0028] Further, as a 6-membered ring containing three hetero atoms, triazine ring can be mentioned.

[0029] In formula (1), A can be polycyclic. Described specifically, it can be a polycyclic ring formed of plural rings one-dimensionally connected together by single bonds, respectively, as indicated by the below-described formula (7). [0030] Here, Z represents an oxygen atom or a sulfur atom. On the other hand, m stands for an integer of from 0 to 2. Of these, Z is preferably a sulfur atom. The preferred value of m is 0 or 1, with 0 being a more preferred value.



[0031] The carbocyclic aromatic ring represented by A in formula (1) is a cyclic compound in which the atoms constituting an aromatic ring are all carbon atoms. The carbocyclic aromatic ring is formed of a 5-membered ring or a 6-mebered ring. The carbocyclic aromatic ring may preferably be composed of a single ring or 2 to 5 aromatic rings fused together, with a single ring or 2 to . 4 aromatic rings fused together being more preferred.

[0032] The number of carbon atoms contained in the carbocyclic aromatic ring may preferably range from 6 to 22, with a range of from 6 to 18 being more preferred.

**[0033]** As specific examples of such carbocyclic aromatic rings, fused polycyclic aromatic rings can be mentioned. Illustrative are pentalene ring, phenalene ring, triphenylene ring, perylene ring, indene ring, azulene ring, phenanthrene ring, pyrene ring, and picene ring. Among these, acene-type aromatic rings are preferred. Specific examples include benzene ring, naphthalene ring, anthracene ring, napthacene ring, and pentacene ring. Among these, more preferred

are benzene ring, naphthalene ring and anthracene ring, with benzene ring and naphthalene ring being still more preferred.

[0034] In formula (1), A can be polycyclic. Described specifically, it can be a polycyclic ring formed of plural rings one-dimensionally connected together by single bonds, respectively, as indicated by the below-described formula (8). Here, m is an integer of from 0 to 2. The preferred value of m is 0 or 1, with 0 being a more preferred value.

5

10

15

20

25

30

[0035] In formula (1), A may be of such a structure as illustrated by the below-described formula (9). Specific examples include carbazole ring ( $Z^3$ =NH), dibenzofuran ring ( $Z^3$ =O), dibenzothiphene ring ( $Z^3$ =S), fluorene ring ( $Z^3$ =CH<sub>2</sub>), fluorenone ring ( $Z^3$ =CO), and dibenzothiophensulfone ring ( $Z^3$ =SO<sub>2</sub>). Among these, preferred are dibenzothiophene ring, fluorene ring, fluorene ring and dibenzothiophensulfone ring, with dibenzothiophene ring, fluorene and fluorenone ring being more preferred.

$$(9)$$

[0036] Preferred structures as the carbocyclic aromatic ring or heterocyclic aromatic ring represented by A are the following structural formulas:

50 [0037] The heterocyclic aromatic ring or carbocyclic aromatic ring represented by A in formula (1) may contain one or more substituents. Illustrative of such substituents are alkyl groups, alkoxy groups, and halogen atoms.

**[0038]** As alkyl groups, alkyl groups having 1 to 4 carbon atoms are preferred. Specific preferred examples include linear alkyl groups such as methyl, ethyl, n-propyl and n-butyl, and branched alkyl groups such as isopropyl, s-butyl and t-butyl.

<sup>55</sup> [0039] As alkoxy groups, alkoxy groups having 1 to 3 carbon atoms are preferred. Specific preferred examples include methoxy, ethoxy, propoxy, and isopropoxy.

[0040] Illustrative of halogen atoms are fluorine atoms, chlorine atoms, bromine atoms and iodine atoms, with fluorine atoms and chlorine atoms being preferred.

[0041] These substituents are chosen in view of the melting point, the compatibility with the associated polymer, and the like. If the compatibility with the associated polymer is poor, introduction of t-butyl group(s) or the like is effective. [0042] A description will next be made about B¹ to Bⁿ in formula (1). B¹ to Bⁿ each independently represent a substituted or unsubstituted, carbocyclic or heterocyclic aromatic group.

[0043] In the heterocyclic aromatic group, the aromatic ring is composed of atoms of two or more elements. Illustrative of the atoms of two or more elements are carbon atom, oxygen atom, phosphorus atom, sulfur atom, and nitrogen atom. The aromatic ring may preferably be composed of atoms of 2 to 5 types of elements, with atoms of 2 to 4 types of elements being more preferred. Incidentally, atoms other than carbon atom will be referred to as "hetero atoms".

5

10

15

20

25

30

35

40

45

50

55

[0044] The heterocyclic aromatic group may be composed of either a 5-membered ring or a 6-membered ring. The heterocyclic aromatic group may preferably be composed of 1 to 4 aromatic rings fused together; with 1 to 3 aromatic rings fused together being more preferred.

[0045] The number of carbons contained in the heterocyclic aromatic group may preferably be 4 to 14, with 4 to 11 being more preferred.

[0046] More preferred specific examples of the heterocyclic aromatic group will be described. Firstly, 5-membered rings each of which is represented by the following formula (10) and contains one hetero atom can be mentioned. Illustrative of the formula (10) are furyl group (Z=O), thienyl group (Z=S) and pyrrolyl group (Z=NH). Among these, preferred are thienyl group and furyl group, and more preferred is thienyl group.

(10)


[0047] Further, the following formula (11) with a benzene ring fused with formula (10) can be mentioned. Illustrative of the formula (11) are indolyl group (Z=NH), benzofuryl group (Z=O) and benzothienyl group (Z=S). Among these, preferred are benzothienyl group and benzofuryl group, with benzothienyl group being more preferred.

(11)

[0048] Next, 5-membered rings each of which is represented by the following formula (12a) or (12b) and contains two hetero atoms can be mentioned. Illustrative of formula' (12a) are oxazolyl group ( $Z^1=O$ ), thiazolyl group ( $Z^1=S$ ) and imidazolyl group ( $Z^1=NH$ ). Illustrative of formula (12b) are isoxazolyl group ( $Z^2=O$ ), isothiazolyl group ( $Z^2=NH$ ). Among these, preferred are oxazolyl group and thiazolyl group, with thiazolyl group being more preferred.



**[0049]** Further, the following general formula (13a) or (13b) with a benzene ring fused with the 5-membered ring of formula (12a) or (12b) can be mentioned. Illustrative of formula (13a) are benzoxazolyl group ( $Z^1=O$ ), benzothiazolyl group ( $Z^1=S$ ) and benzimidazolyl group ( $Z^1=NH$ ). Illustrative of formula (13b) are benzisoxazolyl group ( $Z^2=O$ ), benzisothiazolyl group ( $Z^2=S$ ) and benzopyrazolyl ( $Z^2=NH$ ). Among these, preferred are benzothiazolyl and benzothiazoly, with benzothiazolyl being more preferred.



10

15

20

25

30

35

5

**[0050]** Examples of 5-membered rings each of which contains 3 or more hetero atoms include n-triazyl group, s-triazyl group, 1,2,4-oxadiazolyl group, 1,3,5-oxadiazolyl group, 1,2,5-oxadiazolyl group, 1,2,5-thiadiazolyl group, 1,2,5-thiadiazolyl group and tetrazolyl group. Among these, preferred are 1,3,5-oxadiazolyl group and 1,3,5-thiadiazolyl group, with 1,3,5-thiadiazolyl group being more preferred.

[0051] As a 6-membered ring which contains one hetero atom, pyridyl group can be mentioned. In addition, quinolyl group and isoquinolyl group each of which contains a pyridyl group and a benzene ring fused therewith can also be mentioned. Preferred is pyridyl group.

**[0052]** Next, examples of 6-membered rings each of which contains two hetero atoms include pyridazyl group, pyrimidyl group and pyrazyl group. Benzo[d]pyridazyl group, benzo[c]pyridazyl group, quinazolyl group and quinoxalinyl group can also be mentioned, each of which is composed of such a 6-membered ring and a benzene ring fused therewith.

[0053] As a 6-membered ring containing three hetero atoms, triazyl group can be mentioned.

**[0054]** The carbocyclic aromatic group represented by B¹ to Bⁿ in formula (1) is a cyclic compound group in which the atoms constituting an aromatic ring are all carbon atoms. The carbocyclic aromatic group is formed of a 5-membered ring or a 6-mebered ring. The carbocyclic aromatic group may preferably be composed of a single ring or 2 to 5 ' aromatic rings fused together, with a single ring or 2 to 4 aromatic rings fused together being more preferred.

[0055] The number of carbon atoms contained in the carbocyclic aromatic group may preferably range from 6 to 22, with a range of from 6 to 18 being more preferred.

**[0056]** As specific examples of such carbocyclic aromatic groups, fused polycyclic aromatic groups can be mentioned. Illustrative are pentalenyl group, phenalenyl group, triphenylenyl group, perylenyl group, indenyl group, azulenyl group, phenanthrenyl group, pyrenyl group, and picenyl group. Among these, acene-type aromatic groups are preferred. Specific examples include phenyl group, naphthyl group, anthryl group, naphtacenyl group, and pentacenyl group. Among these, preferred are phenyl group, naphthyl group-and anthracenyl group, with phenyl group and naphthyl group being more preferred.

[0057] Structures preferred as B<sup>1</sup> to B<sup>n</sup> in formula (1) are the following structural formulas.

55

[0058] In formula (1), B<sup>1</sup> to B<sup>n</sup> may all be the same or may all be different.

[0059] The carbocyclic aromatic group or heterocyclic aromatic group represented by each of B<sup>1</sup> to B<sup>n</sup> may contain one or more substituents. Illustrative of such substituents are alkyl groups, alkoxy groups, and halogen atoms.

[0060] As alkyl groups, alkyl groups having 1 to 4 carbon atoms are preferred. Specific preferred examples include linear alkyl groups such as methyl, ethyl, n-propyl and n-butyl, and branched alkyl groups such as isopropyl, s-butyl

and t-butyl. Particularly preferred are methyl, ethyl, n-butyl and t-butyl.

10

20

25

30

35

45

50

55

As alkoxy groups, alkoxy groups having 1 to 3 carbon atoms are preferred. Specific preferred examples include methoxy, ethoxy, propoxy, and isopropoxy, with methoxy being particularly preferred.

**[0061]** Illustrative of halogen atoms are fluorine atoms, chlorine atoms, bromine atoms and iodine atoms, with fluorine atoms and chlorine atoms being preferred. Particularly preferred is fluorine atom.

[0062] These substituents are chosen in view of the melting point, the compatibility with the associated polymer, and the like. If the compatibility with the associated polymer is poor, introduction of t-butyl group(s) or the like is effective. When a linear alkyl group is introduced to an asymmetrical position, for example, when a methyl group is introduced to an asymmetrical position of a phenyl group, the meta-position is more preferred than the para-position.

[0063] In formula (1), n stands for an integer of from 2 to 12. No particular limitation is imposed on n, because it is determined depending upon the molecular structure of A. When A is a heterocyclic aromatic ring, the preferred range of n is from 2 to 6, with a range of from 2 to 4 being more preferred. When A is a carbocyclic aromatic ring, on the other hand, the preferred range of n is from 2 to 10, with a range of from 2 to 6 being more preferred.

[0064] In formula (1), k stands for an integer of from 1 to n. Concerning the position(s) of substitution, it is preferred to introduce the substituent(s) such that the resulting molecule has as high symmetry as possible. Described specifically, when n=3, it is more preferred to introduce the substituents to the 1,3,5-positions of a benzene ring rather than to its 1,2,4-positions.

[0065] The optical material making use of the aromatic sulfide compound according to the present invention can be used as a material for lenses or optical filters or as an antireflection film by combining it with a material of low refractive index into a laminated film. Further, the optical material can also be applied to lenses such as general camera lenses, video camera lenses, laser pickup lenses, for laser printers, Fresnel lenses, lenses for liquid crystal projectors, and eyeglass lenses; optical parts such as screens for projectors, optical fibers, optical waveguides, and prisms; and the like. Among these, it can be suitably used as a material for POFs.

[0066] Such optical parts can be divided into two groups, one containing a transparent polymer and a dopant in an evenly dispersed form, and the other containing them with a specific distribution. When an optical material has a refractive index distribution, it is preferred to apply the optical material to array lenses for use in GI POFs and copying machines.

[0067] For the production of the optical material according to the present invention, conventionally known molding processes can be used including injection molding, compression molding, micromolding, floating molding, the Rolinx process, and casting. According to casting, an optical material according to the present invention may be produced as a molded product by allowing polymerization of the aromatic sulfide compound to proceed partially, pouring the partially-polymerized aromatic sulfide compound into a mold, and then subjecting it to final polymerization. According to injection molding, on the other hand, a molding sample can be obtained by adding a dopant to a thermoplastic 'resin and stirring them until a homogeneous mixture is formed. According to pouring, an optical material can be obtained, for example, by adding a dopant to a UV curable monomer and mixing them until a homogeneous mixture is formed.

[0068] Molded products obtained by such molding processes as described above can be improved in moisture resistance, optical properties, chemical resistance, abrasion resistance, anti-mist property and the like by coating their surfaces with an inorganic compound such as MgF<sub>2</sub> or SiO<sub>2</sub> in accordance with vacuum deposition, sputtering, ion plating or the like or by applying an organic silicon compound such as a silane coupling agent, a vinyl monomer, a melamine resin, an epoxy resin, a fluorinated resin, a silicone resin or the like as hard coatings onto their surfaces.

[0069] A description will hereinafter be made more specifically about use of the aromatic sulfide compound according to the present invention as a material for GI POFs.

**[0070]** When the aromatic sulfide compound according to the present invention is used for such an application, it is generally used as a high refractive index dopant. The refractive index may preferably be in a range of from 1.60 to 2.0, with a range of 1.63 to 1.90 being more preferred.

[0071] One of these high refractive index dopants may be singly included in a core part, or plural ones of such dopants may be chosen and included in combination in a core part. As a further alternative, one or more of these dopants may be included along with one or more other known dopants in a core part.

[0072] No particular limitation is imposed on the content of the high refractive index dopant in the core part of POF insofar as a desired refractive index distribution is obtained and the fiber is not impaired in mechanical strength and the like. Upon production of a POF material by polymerization, it is preferred to have the high refractive index dopant included in the core part of the produced POF material by adding the dopant to a monomer for a core-part-forming polymer and then subjecting the resultant mixture of the monomer and the dopant to a polymerization reaction. The content of the high refractive index dopant in the core part of POF may be preferably 60 wt.% or lower, more preferably 50 wt.% or lower, still more preferably 45 wt.% or lower.

[0073] No particular limitation is imposed on the molecular volume of the high refractive index dopant compound according to the present invention useful in POFs, because the molecular volume is determined depending upon the monomer for the core-part POF material to be used in combination with the dopant compound. In' view of the fact that

the molecular volume of methyl methacrylate employed in conventional POFs is approximately 101 Å<sup>3</sup>, the molecular volume is preferably in a range of from 100 to 500 Å<sup>3</sup>, more preferably in a range of from 150 to 400 Å<sup>3</sup>, both when methyl methacrylate is used as a core-part preform monomer.

**[0074]** Existence of a large difference in refractive index between a central part and an outer peripheral part of an optical fiber is preferred because such a large difference makes it possible not only to lower the transmission loss but also to reduce the connection loss and bending loss. The numerical aperture of a plastic optical fiber according to the present invention may preferably in a range of from 0.15 to 0.40, more preferably in a range of from 0.18 to 0.30.

[0075] As has been described above, aromatic sulfide compounds according to the present invention comprise compounds having the skeleton represented by formula (1). Specific examples of such aromatic sulfide compounds can include the compounds described in the following table.

Specific illustrative compounds (n=2)

	ectific illustrat		- 2 )
No.	A	B <sup>1</sup>	B <sup>2</sup>
1	<b>—</b>	H <sub>3</sub> C	H <sub>3</sub> C
2	Same as above	Z	
3	Same as above		
4	Same as above		
5	Same as above	O'S	○N O
6	Same as above	S	s
7	Same as above	H <sub>3</sub> C S	H <sub>3</sub> C S
8	Same as above	H <sub>3</sub> C S	H <sub>3</sub> C S

	Specific illustrative compounds (n=2)				
5	No.	A	B <sup>1</sup>	B <sup>2</sup>	
10	9	CH <sub>3</sub>	н³со-{_}	н₃со-⟨_у_	
	10	Same as above	N N	⟨N	
15	11	Same as above			
20	12	Same as above			
25	13	Same as above	H <sub>3</sub> CO N	H3CO N	
. 30	14	Same as above	C <sub>4</sub> H <sub>9</sub>	C <sub>4</sub> H <sub>9</sub>	
35	15	Same as above	C <sub>s</sub>	s s	
	16	Same as above	H <sub>3</sub> C S	H³C R	

Specific illustrative compounds (n=2)				
5	No.	A	B <sup>1</sup>	B <sup>2</sup>
10	17		C <sub>2</sub> H <sub>5</sub>	C <sub>2</sub> H <sub>5</sub>
	18	Same as above	N N	<b>₹</b> N
15	19	Same as above	-C(CH <sub>3</sub> ) <sub>3</sub>	-C(CH <sup>3</sup> ) <sup>3</sup>
20	20	Same as above		
25	21	Same as above	z s	z s
30	22	Same as above	S C <sub>3</sub> H <sub>7</sub>	C <sub>3</sub> H <sub>7</sub>
	23	Same as above	⇒ N S	○\s
35	24	Same as above	H <sub>3</sub> C S	H <sub>3</sub> C S

Sp	ecific illustrati	ve compounds (n=	
No.	A	$B^1$	B <sup>2</sup>
25	N-N S	<b></b>	<u></u>
26	Same as above	Z	√N
27	Same as above		
28	Same as above		
29	Same as above	○ No	QN-
30	Same as above	S	S
31	Same as above	√ <sub>s</sub>	CI'S
. 32	Same as above	H C N-N	N-N

	Specific illustrative compounds (n=2)				
5	No.	A	B <sup>1</sup>	B <sup>2</sup>	
	33	s	C <sub>2</sub> H <sub>5</sub> —	C <sub>2</sub> H <sub>5</sub> —	
10	34	Same as above		N N	
15	35	Same as above			
20	36	Same as above			
25	37	Same as above		~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~	
	38	Same as above	H <sub>3</sub> C	H <sub>3</sub> C	
30	39	Same as above	N <sub>s</sub>	∑ <sub>s</sub>	
35	40	Same as above	H <sub>3</sub> C S	H <sub>3</sub> C S	

Specific	illustrative	compounds	(n=2)
ODCCTTTC	TTTUD CTGCTVC	Compounds	(11-2)

9	pecific illustr	active compounds	(11-2)
No.	A	B <sup>1</sup>	B <sup>2</sup>
41		H³C-	н³с-{_}
42	Same as above	_N	
43	Same as above		
44	Same as above		
45	Same as above		ON-
46	Same as above	C <sub>2</sub> H <sub>5</sub>	C <sub>2</sub> H <sub>5</sub>
47	Same as above	₩ S	N S
48	Same as above	H <sub>3</sub> C S	H <sub>3</sub> C S

	Specific illustrative compounds (n=2)			
_	No.	A	$B^1$	B <sup>2</sup>
	49		CH₃	CH₃
	50	Same as above		N N
15	51	Same as above		
20	52	Same as above		
25	53	Same as above	<b>&gt;</b>	○ N
4	54 ·	Same as above	H <sub>3</sub> C S	H <sub>3</sub> C S
30	55	Same as above	CT <sub>s</sub>	⇒ S
35	56	Same as above	H.C e	H <sub>-</sub> C - e

Specific	illustrative	compounds	n=21

		becilic illuscraci		
	No.	A	$B^1$	B <sup>2</sup>
	57	H <sub>3</sub> C	H³C	H <sub>3</sub> C
	58	Same as above	~ <u>N</u>	<
,	59	Same as above		
	60	Same as above		
	61	Same as above		₩.
	62	Same as above	C <sub>2</sub> H <sub>5</sub> S	C <sub>2</sub> H <sub>5</sub> S
	63	Same as above	H <sub>3</sub> C S	H³C Z Z
	64	Same as above	H <sub>3</sub> C S	H <sub>3</sub> C S

	Sp	ecific illustrat	ive compounds (n=	=2)
;	No.	A	$B^1$	B <sup>2</sup>
o	65	S s	H³C	H <sub>3</sub> C
	66	Same as above	N N	N-
5	67	Same as above		
0	68	Same as above		
5	69	Same as above		O,
	70	Same as above	C <sub>2</sub> H <sub>5</sub> S	C <sub>2</sub> H <sub>5</sub>
	71	Same as above	₩ S	◯\s\-
5	. 72	Same as above	H <sub>3</sub> C S	H <sub>3</sub> C S

	Specific illustrative compounds (n=2)			
	No.	A	B <sup>1</sup>	B <sup>2</sup>
5	73	o o	C <sub>2</sub> H <sub>5</sub> —	C <sub>2</sub> H <sub>5</sub> —
10	. 74	Same as above	N N	<-N
15	75	Same as above		
20	76	Same as above		
25	77	Same as above		
	78	Same as above	H <sub>3</sub> C S	H <sub>3</sub> C S
30 -	79	Same as above	C)s	CI'S
35	80	Same as above	H <sub>3</sub> C	H <sub>3</sub> C S

S	Specific illustrative compounds (n=2)					
No.	A	B <sup>1.</sup>	B <sup>2</sup>			
81	N.S.N s	H <sub>3</sub> C	H <sub>3</sub> C			
82	Same as above	N N	N.			
83	Same as above					
84	Same as above					
85	Same as above					
86	Same as above	C <sub>2</sub> H <sub>5</sub>	C <sub>2</sub> H <sub>5</sub>			
87	Same as above	⇒ S	○\s\s			
88	Same as above	H <sub>3</sub> C S	H <sub>3</sub> C S			

Specific illustrative compounds (n=2)				
5	No.	A	B <sup>1</sup>	B <sup>2</sup>
	89	N N	C <sub>2</sub> H <sub>5</sub> —	C <sub>2</sub> H <sub>5</sub> —
10	90	Same as above	-N	_N_
15	91	Same as above		
20	92	Same as above		
	93	Same as above		
	94	Same as above	H <sub>3</sub> C S	H <sub>3</sub> C S
30	95	Same as above	C)s	CT <sub>s</sub>
35	96	Same as above	H <sub>3</sub> C S	H <sub>3</sub> C S

Specific illustrative compounds (n=2)				
5	No.	A	$B^1$	B <sup>2</sup>
10	97		H <sub>3</sub> C	H <sub>3</sub> C
	98	Same as above	_N	
15	99	Same as above		
20	100	Same as above		
25	101	Same as above		ON.
30	102	Same as above	C <sub>2</sub> H <sub>5</sub>	C <sub>2</sub> H <sub>5</sub>
	103	Same as above	N <sub>s</sub>	Ŭ <sub>s</sub> ·
35	104	Same as above	H³C 8	H <sub>3</sub> C S

Specific illustrative compounds (n=2)				
	No.	A	B <sup>1</sup>	B <sup>2</sup>
5	105	s	C <sub>2</sub> H <sub>5</sub>	
10	106	Same as above	~ N	
15	107	Same as above		
20	108	Same as above		
25	109	Same as above		O'S-
	110	Same as above	H <sub>3</sub> C S	H <sub>3</sub> C S
30	111	Same as above	O's	CI'S
35	112	Same as above	H <sub>3</sub> C S	H <sub>3</sub> C S

Specific illustrative compounds (n=2)				
_	No.	A	B <sup>1</sup>	B <sup>2</sup>
5	113	-S-S-	H <sub>3</sub> C	H <sub>3</sub> C
	114	Same as above	N	N N
15	115	Same as above		
20	116	Same as above		
25	117	Same as above	○N <sub>O</sub>	
	118	Same as above	C2H5 S	C <sub>2</sub> H <sub>5</sub>
30	119	Same as above	○ N S	() <sub>s</sub>
35	120	Same as above	H <sub>3</sub> C S	H <sub>3</sub> C S

Specific illustrative compounds (n=2)					
	No.	· A	B <sup>1</sup>	B <sup>2</sup>	
5	121	s	C <sub>2</sub> H <sub>5</sub>	C <sub>2</sub> H <sub>5</sub> —	
10	122	Same as above	N N	N—	
15	123	Same as above			
20	124	Same as above			
25	125	Same as above	H <sub>3</sub> CO N	H³CO N	
	126	Same as above	H <sub>3</sub> C S	H <sub>3</sub> C S	
30	127	Same as above	N <sub>s</sub>	○ N N N N N N N N N N N N N N N N N N N	
35	128	Same as above	H <sub>3</sub> C S	H <sub>3</sub> C S	

	Specific illustrative compounds (n=2)				
5	No.	A	B <sup>1</sup>	B <sup>2</sup>	
10	129	s	H <sub>3</sub> C	н <sub>3</sub> с	
	130	Same as above	N N	_N	
15	131	Same as above			
20	132	Same as above			
25	133	Same as above		CV>	
30	134	Same as above	C <sub>2</sub> H <sub>5</sub>	C <sub>2</sub> H <sub>5</sub>	
	135	Same as above	O's	IJ <sub>s</sub> →	
35	136	Same as above	H <sub>3</sub> C	H <sub>2</sub> C	

Specific illustrative compounds (n=2)					
	No.	A	B <sup>1</sup>	B <sup>2</sup>	
	137		C <sub>2</sub> H <sub>5</sub> —	C <sub>2</sub> H <sub>5</sub> —	
	138	Same as above		N N	
·	139	Same as above			
	140	Same as above			
	141	Same as above			
	142	Same as above	H <sub>3</sub> C S	H <sub>3</sub> C S	
	143	Same as above	⇒ N S	○\s	
	144	Same as above	H <sub>3</sub> C S	H <sub>3</sub> C S	

Specific illustrative compounds (n=2)				
	No.	A	B <sup>1</sup>	B <sup>2</sup>
5	145	-		H <sub>3</sub> C
10	146	Same as above		H <sub>3</sub> C S
15	147	Same as above		н"с-
20	148	Same as above		S
25	149	Same as above	N <sub>o</sub>	
	150	Same as above	H <sub>3</sub> C	S
<i>30</i>	151	Same as above	Ŭ <sub>s</sub>	CH₃
35	152	Same as above	H <sub>2</sub> C	

Specific	illustrat	ive c	ompound	ls (n=	=2)
	7		51		

	No.	A	B <sup>1</sup>	B <sup>2</sup>
5	153		CH₃	
10	154	Same as above	_N	s
15	155	Same as above		H <sub>3</sub> C
20	156	Same as above		H <sub>3</sub> C
25	157	Same as above	H <sub>3</sub> C N	
30	158	Same as above	s	H <sub>3</sub> C
25	159	Same as above	⇒ S	QN-
35	160	Same as above	H <sub>3</sub> C S	J.

Specific illustrative compounds (n=2)					
	No.	A	$B^1$	B <sup>2</sup>	
5	161		H <sub>3</sub> C	H <sub>3</sub> C-{}	
10	162	Same as above			
15	163	Same as above		H³C	
20	164	Same as above		H <sub>3</sub> C S	
25	165	Same as above	H <sub>3</sub> C S		
30	166	Same as above	H <sub>3</sub> C	_N	
	167	Same as above	○ N S	CH₃	
40	168	Same as above	H <sub>3</sub> C	H <sub>3</sub> C S	

Specific illustrative compounds (n=2)				
_	No.	A	$B^1$	B <sup>2</sup>
5	169	N-N s	~ <u>N</u>	H³C
10	. 170	Same as above	₩,	
15	171	Same as above		CH <sub>3</sub>
20	172	Same as above		CT <sub>s</sub>
25	173	Same as above	H³C—	S
30	174	Same as above		H <sub>3</sub> C S
	175	Same as above	H <sub>3</sub> C	H <sub>3</sub> C S
35	176	Same as above	S S	H³C

Specific	illustrative	compounds	(n=2)
	TTT 40 01 4 01 4 0	Octobouries (	,

	Specific illustrative compounds (n=2)				
{	No.	Α	$B^1$	B <sup>2</sup>	
	177	s			
	178	Same as above	N N	H³C	
	179	Same as above			
	180	Same as above		CH₃	
	181	Same as above	H <sub>3</sub> C S	H <sub>3</sub> CO N	
	182	Same as above	H <sub>3</sub> C-	S	
	183	Same as above		₩ s	
	184	Same as above	H <sub>3</sub> C S	H <sub>3</sub> C S	

Specific illustrative compounds (n=2)					
5	No.	A	B¹	B <sup>2</sup>	
-	185			H <sub>3</sub> C S	
10	186	Same as above		_N	
15	187	Same as above	C <sub>2</sub> H <sub>5</sub>		
20	188	Same as above		H <sub>3</sub> C S	
25	189	Same as above	C <sub>2</sub> H <sub>5</sub>	CV <sub>0</sub>	
	190	Same as above	н₃с-{_}	H <sub>3</sub> C S	
30	191	Same as above	H <sub>3</sub> C S	H³C	
35	192	Same as above	H <sub>3</sub> C S		

Specific illustrative compounds	(n=2)
---------------------------------	-------

	Specific fillustrative compounds (n-2)					
_	No.	A	B <sup>1</sup>	B <sup>2</sup>		
5	193		H³C	C <sub>2</sub> H <sub>5</sub> —		
	. 194	Same as above	√N			
15	195	Same as above		H <sub>3</sub> C S		
20 .	196	Same as above		○ N S		
25	197	Same as above	○N O	(s)		
<i>30</i>	198	Same as above	N-N S	S		
35	199	Same as above	CIN-	H <sub>3</sub> C		
	200	Same as above	H³C-{_}	N-N S		

Sp	ecific illustrati	.ve compounds (n=	2)
No.	A	$B^1$	B <sup>2</sup>
201		$C_2H_5$	H <sub>3</sub> C S
202	Same as above	—(	_N
203	Same as above		-CI
204	Same as above		S N
205	Same as above	-€_>-ОСН <sub>3</sub>	H <sub>3</sub> CO N
206	Same as above	H <sub>3</sub> C	H <sub>3</sub> C S
207	Same as above	○ N S	H <sub>3</sub> C
208	Same as above	H <sub>3</sub> C S	H <sub>3</sub> C S

_	Specific illustrative compounds (n=2)				
5	No.	A	B <sup>1</sup>	B <sup>2</sup>	
10	209	S	H <sub>3</sub> C		
	210	Same as above		H <sub>3</sub> C S	
15	211	Same as above		ON-	
20	212	Same as above		H³C	
25	213	Same as above		н³с-{_}	
30	214	Same as above	H <sub>3</sub> C	C <sub>2</sub> H <sub>5</sub> S	
	215	Same as above	S S	CT <sub>0</sub>	
35	216	Same as above	H <sub>3</sub> C S		

S	pecific illustrat	ive compounds (n=	=2)
No.	A	$B^1$	B <sup>2</sup>
217	o s o	H <sub>3</sub> C	
218	Same as above	. < <u>N</u>	H <sub>3</sub> C S
219	Same as above		—(С(СН <sup>3</sup> ) <sup>3</sup>
220	Same as above		H <sub>3</sub> C
221	Same as above	O'N-	H³C-{_}
222	Same as above	H <sub>3</sub> C S	C <sub>2</sub> H <sub>5</sub>
223	Same as above	○ S	ON-
224	Same as above	H³C S	

	Sp	ecific illus	strative comp		
	No.	A	B <sup>1</sup>	B <sup>2</sup>	B <sup>3</sup>
5	225		—⟨C³H³	−∕€_}−C³H³	$ C_3H_9$
10	226	Same as above	⟨N N	N N	N N
15	227	Same as above	s	s	S
	228	Same as above	s	s	s
20	229		CH <sub>3</sub>	CH <sub>3</sub>	CH <sub>3</sub>
25	230	Same as above	_N	N N	_N
30	231	Same as above	SN	SN	√s N
	232	Same as above	C <sub>2</sub> H <sub>5</sub>	C <sub>2</sub> H <sub>5</sub>	C <sub>2</sub> H <sub>5</sub>
35	233	N N			
40	234	Same as above	~ <u>N</u>	<b>√</b> N	(N)
45	235	Same as above	S	S	S
50	236	Same as above	C <sub>2</sub> H <sub>5</sub>	C <sub>2</sub> H <sub>5</sub>	C <sub>2</sub> H <sub>5</sub>

EP 1 291 679 A1

[	No.	A	B <sup>1</sup>	B <sup>2</sup>	B <sup>3</sup>
	237	N N	H³C	H <sub>3</sub> C	H³C
	238	Same as above	N N	~N	
.,	239	Same as above	S	S	S
	240	Same as above	s	s	s
	241	T <sub>N</sub>	-(CH3)3	-{	—⟨¯}−С(СН³)³
	242	Same as above	H <sub>3</sub> CO-	H <sub>3</sub> CO-	H <sub>3</sub> CO—
	243	Same as above	S	S	SN S
	244	Same as above	s	s	s
	245	S CH <sub>3</sub>			
	246	Same as above	€N N	<b>₹</b> N	∠N_
	247	Same as above	S	S	SN S
	248	Same as above	s	s	s

	S	pecific illus	trative compo	ounds $(n=3)$	
5	No.	A	B <sup>1</sup>	B <sup>2</sup>	B <sup>3</sup>
3	249	00	CH <sub>3</sub>	CH <sub>3</sub>	CH <sub>3</sub>
10	250	Same as above	N N	N N	Z Z
15	251	Same as above	S	Z S	S
20	252	Same as above	S	S	S
25	253		C <sub>2</sub> H <sub>5</sub>	C <sub>2</sub> H <sub>5</sub>	C <sub>2</sub> H <sub>5</sub>
	254	Same as above	C <sub>2</sub> H <sub>5</sub>	C <sub>2</sub> H <sub>5</sub> S	C <sub>2</sub> H <sub>5</sub>
30	255	Same as above	S	S	S
	256	Same as above			

Specific	illustrative	compounds	(n=4)
	~~~~~~~~~~~	O O THE O O THE O	44 - 4 1

	Decilie fildscrative compounds (11-4)				
No.	n	A	$B^1 \sim B^n$		
257	4	s	н₃с-{_}		
258	Same as above	Same as above	~N N N		
259	Same as above	Same as above			
260	Same as above	Same as above	OC <sub>2</sub> H <sub>5</sub>		
261	Same as above	Same as above			
262	Same as above	Same as above	S		
263	Same as above	Same as above	CI'S		
264	Same as above	Same as above	H <sub>3</sub> C S		

EP 1 291 679 A1

•	No.	n	A	$B^1 \sim B^n$
	265	4		H <sub>3</sub> C
	266	Same as above	Same as above	N N
	267	Same as above	Same as above	
	268	Same as above	Same as above	
	269	Same as above	Same as above	CIN-
	270	Same as above	Same as above	H³C ~ S
	271	Same as above	Same as above	CI <sub>s</sub>
	272	Same as above	Same as above	H <sub>3</sub> C S

EP 1 291 679 A1

No.	n	A	$B^1 \sim B^n$
273	4		CH <sub>3</sub> CH <sub>3</sub>
274	Same as above	Same as above	
275	Same as above	Same as above	
276	Same as above	Same as above	
277	Same as above	Same as above	H <sub>3</sub> C N
278	Same as above	Same as above	s
279	Same as above	Same as above	CT <sub>s</sub>
280	Same as above	Same as above	H <sub>3</sub> C S

EP 1 291 679 A1

No.	n	A	$B^1 \sim B^n$
281	. 4		H <sub>3</sub> C
282	Same as above	Same as above	N-
283	Same as above	Same as above	
284	Same as above	Same as above	
285	Same as above	Same as above	
286	Same as above	Same as above	H <sub>3</sub> C S
287	Same as above	Same as above	CI'S
288	Same as above	Same as above	H <sub>3</sub> C S

EP 1 291 679 A1

:				
	No.	n	A	B <sup>1</sup> ~B <sup>n</sup>
0	289	4	-S-S	H³C
5	290	Same as above	Same as above	··· · · · · · · · · · · · · · · · · ·
	291	Same as above	Same as above	
0	292	Same as above	Same as above	
5	293	Same as above	Same as above	
9	294	Same as above	Same as above	S
5	295	Same as above	Same as above	H <sub>3</sub> C
	296	Same as above	Same as above	H <sub>3</sub> C S

EP 1 291 679 A1

5				
5	No.	n	A	$B^1-B^n$
10	297	5		H³C
. 15	298	Same as above	Same as above	- (N)
	299	Same as above	Same as above	
20	300	Same as above	Same as above	—(ССН <sup>3</sup> )3
25	301	Same as above	Same as above	
	302	Same as above	Same as above	H <sub>3</sub> C S
30	303	Same as above	Same as above	CI's
35	304	Same as above	Same as above	H <sub>3</sub> C S

# Specific illustrative compounds (n=6)

	No.	n	A	B <sup>1</sup> ~B <sup>n</sup>
1	305	6		{
;	306	Same as above	Same as above	~ N
	307	Same as above	Same as above	
	308	Same as above	Same as above	
	309	Same as above	Same as above	○N O
,	310	Same as above	Same as above	s
;	311	Same as above	Same as above	CI'S
	312	Same as above	Same as above	H <sub>3</sub> C S

EP 1 291 679 A1

No.	n	A	$B^1 \sim B^n$
313	8		H <sub>3</sub> C
314	Same as above	Same as above	
315	Same as above	Same as above	
316	Same as above	Same as above	—(С(СН <sup>3</sup> ) <sup>3</sup>
317	Same as above	Same as above	CIN-
318	Same as above	Same as above	H <sub>3</sub> C S
319	Same as above	Same as above	C S
320	Same as above	Same as above	H <sub>3</sub> C S


EP 1 291 679 A1

	No.	n	A	$B_1 \sim B_n$
	321	10		—∕∑—осн <sub>³</sub>
	322	Same as above	Same as above	_N_
	323	Same as above	Same as above	
	324	Same as above	Same as above	-C(CH <sub>3</sub> ) <sub>3</sub>
	325	Same as above	Same as above	
-	326	Same as above	Same as above	S
	327	Same as above	Same as above	H <sub>3</sub> C S
	328	Same as above	Same as above	H <sub>3</sub> C S

EP 1 291 679 A1

1	No.	n	A	$B^1-B^n$
	329	10		H <sub>3</sub> C
	330	Same as above	Same as above	C <sub>2</sub> H <sub>5</sub>
	331	Same as above	Same as above	
	332	Same as above	Same as above	
	333	Same as above	Same as above	
	334	Same as above	Same as above	H <sub>3</sub> C S
•	335	Same as above	Same as above	CIN-
	336	Same as above	Same as above	H <sub>3</sub> C S

[0076] The aromatic sulfide compounds according to the present invention can each be obtained by reacting a halide and a thiol compound in the presence of a base.

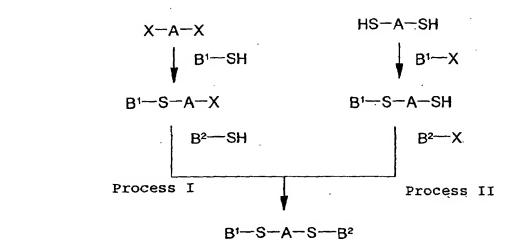

5

10

15

20

25

30

35

40

45

50

55

[0077] A detailed description will next be made about a production process of each aromatic sulfide compound (n=2) according to the present invention. The aromatic sulfide compound can be produced by both of the above-described synthesis routes, although its production process shall not be limited to them.

**[0078]** Process I will hereinafter be described in detail. Described specifically, the aromatic sulfide compound according to the present invention, which is to be included in POFs, can be obtained by reacting a dihalide and a thiol compound in the presence of a base.

[0079] The dihalide which is used in the reaction can be easily obtained by halogenating a corresponding aromatic compound.

[0080] The thiol compound which is also used in the reaction can be readily obtained by a nucleophilic displacement reaction between a diazonium salt and an anionic sulfide as disclosed, for example, in Can. J. Chem., 53, 1480 (1975) or the like. The thiol compound can be used in a total molar proportion 2 to 5 times, preferably 2 to 3 times as much as the dihalogen compound.

**[0081]** Examples of the base employed in the present invention include metal hydroxides such as sodium hydroxide and potassium hydroxide, metal carbonates such as sodium carbonate and potassium carbonate, tertiary amines such as trimethylamine, triethylamine, tripropylamine, tributylamine and N,N-dimethylaniline, and metal alcoholates such as sodium methylate, sodium ethylate and potassium tert-butylate. Preferred examples are metal alcoholates such as sodium methylate and sodium ethylate.

[0082] The base can be used in a molar proportion 2 to 5 times, preferably 2 to 3 times as much as the dihalogen compound.

[0083] The reaction temperature can be in a range of from 100 to 200°C, preferably in a range of from 130 to 180°C. A reaction temperature higher than 180°C leads to an increase in byproducts, so that the yield of the target aromatic sulfide compound is lowered. A reaction temperature lower than 100°C, on the other hand, results in a slow reaction velocity and is not practical.

[0084] Use of a polar organic solvent as a reaction solvent is preferred. Illustrative of the polar organic solvent are N-methyl-2-pyrrolidone, N-propyl-2-pyrrolidone, dimethylacetamide, dimethylformamide, and dimethyl sulfoxide.

**[0085]** As a further production process, the aromatic sulfide compounds can also be produced by the process disclosed, for example, in Tetrahedron, Lett., **39**, 543 (1998).

**[0086]** It is to be noted that the above-described processes are illustrative processes for the production of aromatic sulfide compounds useful as high refractive index dopants in the present invention and that the aromatic sulfide compounds useful as high refractive index dopants in the present invention shall not be limited to those obtained only by these production processes.

[0087] The POF material according to the present invention is composed of a core part and a cladding part having a lower refractive index than a central part of the core part.

[0088] As a polymer for making up the core part of the POF according to the present invention, any polymer can be used without any particular limitation insofar as a transparent polymer can be formed. Illustrative are homopolymers or copolymers of methacrylic esters such as methyl methacrylate, ethyl methacrylate, n-propyl methacrylate, isopropyl methacrylate, n-butyl methacrylate, isobutyl methacrylate, s-butyl methacrylate, t-butyl methacrylate, cyclohexyl methacrylate, benzyl methacrylate, phenyl methacrylate, bornyl methacrylate, adamantyl methacrylate, tricyclodecyl methacrylate, dicyclopentanyl methacrylate, 2,2,2-trifluoroethyl methacrylate, 2,2,3,3-tetrafluoropropyl methacrylate, 2,2,3,4,4,4-hexafluorobutyl methacrylate, 1-trifluoromethyl-2,2,2-trifluoroe-

thyl methacrylate, 1H,1H,5H-octafluoropentyl methacrylate, and blend polymers thereof; homopolymers or copolymers of aliphatically N-substituted maleimide monomers each having a methyl group, ethyl group, n-propyl group, isopropyl group, n-butyl group, isobutyl group, s-butyl group, t-butyl group, cyclohexyl group or the like as a substituent, or blend polymers thereof; and homopolymers or copolymers of styrene and derivatives thereof, and blend polymers thereof.

[0089] As a polymer for making up the cladding part of the POF according to the present invention, any polymer can be used without particular limitation insofar as a transparent polymer can be formed. Usable examples include polymethyl methacrylate (PMMA), polycarbonates (PC), and transparent copolymers between methacrylic acid or methyl methacrylate and other monomers. As such other monomers, acrylic monomers such as monofunctional (meth) acrylates, fluorinated alkyl (meth) acrylates, acrylic acid and methacrylic acid can be used.

5

10

20

25

30

35

40

45

50

55

**[0090]** Known processes can produce the POF according to the present invention. In general, however, it is produced by two processes, which will be exemplified hereinafter. One of these processes is to hot draw a fiber from a preform, and the other is to continuously form a fiber without going through such a preform. Incidentally, an optical material in a form before its spinning into polymer optical fibers will be defined as a "POF preform".

[0091] According to the preform process, a prefabricated hollow tube made of a polymer is filled in its hollow space with a polymerizable solution which can dissolve the polymer of the hollow tube and contains a non-polymerizable, low molecular compound in a dispersed form (i.e., a monomer mixture containing one or more monomer components, a polymerization initiator and a molecular weight modifier), the monomer(s) is polymerized from outside by applying heat or irradiating light from the outside to obtain a rod-shaped preform, and the preform is hot drawn into a desired diameter. The polymer-made hollow tube may be formed of the same monomer mixture as that filled in the hollow space except for the exclusion of the non-polymerizable, low molecular compound, or may be formed of a different monomer mixture provided that a monomer contained as a principal component is the same.

[0092] Further, as the molecular weight modifier, a conventional radical chain transfer agent, for example, a mercaptan such as n-butylmercaptan can be used. As the polymerization initiator, on the other hand, a conventional radical polymerization initiator, for example, an azo compound such as azoisobutyronitrile or peroxide such as benzoyl peroxide can be used. Here, a so-called intermediate temperature initiator capable of effectively producing radicals at about 40°C to about 100°C, such as benzoyl peroxide or lauroyl peroxide, can be suitably used. Therefore, when such an intermediate temperature initiator is used, the temperature of the polymerization reaction is suitably at about 40°C to about 100°C. To avoid development of cracks in the polymer during or-after the polymerization reaction due to heat of the reaction or an expansion or shrinkage by the reaction itself and also to prevent the monomer(s) from boiling under the heat of the reaction in the course of the reaction, it is necessary to control the velocity of the polymerization, reaction. The velocity of the polymerization reaction can be controlled by a combination of a polymerization temperature and an initiator concentration. For conditions that a radical polymerization reaction be initiated at about 40°C to about 100°C, it may be sufficient to add a radical polymerization initiator in a proportion of from 0.001 to 10 wt.% or so, more specifically from 0.01 to 0.3 wt.% or so based on the whole system. In addition to bulk polymerization by such thermal energy, bulk polymerization making use of light energy or the like is also usable. In this polymerization, the velocity of the polymerization reaction can also be controlled by a combination of a quantity of input energy such as temperature and a concentration of the initiator.

[0093] From the standpoint of the workability of drawing upon heating and melting a POF preform and spinning it into POF, the weight average molecular weight of the polymer which makes up the core part and cladding part of the POF preform may be preferably 10,000 or higher but 300,000 or lower, more preferably 30,000 or higher but 250,000 or lower, notably 50,000 or higher but 200,000 or lower.

[0094] When the core or cladding part of a plastic optical fiber material is produced by a polymerization reaction which is initiated by heating, any production system can be suitably used in the present invention irrespective of its type insofar as it can rotate a POF preform and is equipped with a heating means having a temperature-controlling function. However, the progress of this polymerization reaction may be inhibited by oxygen in air in some instances. Therefore, the production system may preferably be equipped with a function to permit sealing the POF preform at opposite ends thereof upon insertion and arrangement of the POF preform in a mold.

**[0095]** As the continuous process, it is possible to adopt such a procedure that a polymer of low polymerization degree, which contains a non-polymerizable compound, and a polymer of high polymerization degree, which does not contain any non-polymerizable compound, are subjected to multicomponent spinning with the latter polymer placed outside to cause diffusion of the internal non-polymerizable compound under heat.

[0096] A coating layer (jacket layer) can be arranged over an outer peripheral wall of a GI POF produced as described above. The coating layer can be formed into a multilayer structure of two or more layers. For the coating layer (jacket layer), known materials such as polyethylene, polyvinyl chloride, chlorinated polyethylene, crosslinked polyethylene, polyolefin elastomer, polyurethane, nylon resin and ethylene-vinyl acetate copolymer can be used.

[0097] The present invention will hereinafter be described specifically based on Examples.

[0098] Synthesis examples of aromatic sulfide compounds according to the present invention will be described in Examples 1-7.

[0099] Measurement of the refractive index of each optical material according to the present invention was conducted as will be described hereinafter. Compositions with a sample dispersed at varied concentrations in PMMA (product of Aldrich Chemical Co., Mw: 120,000) were spin-coated on silicon substrates, respectively, and their refractive indexes were measured by the prism coupler method (wavelength: 633 nm). From a relationship between the concentrations and the refractive indexes, the refractive index of the aromatic sulfide compound according to the present invention was calculated.

[0100] The glass transition temperature of each optical material according to the present invention was measured by DSC (manufactured by MAC Science Co., Ltd.) at a heating rate of 10°C /min.

**[0101]** Performance, as optical parts, of POFs making use of the aromatic sulfide compounds according to the present invention is shown in Examples 16-21. Measurement of each refractive index distribution was conducted by a known method while using "Interfaco Interference Microscope" (manufactured by Carl Zeiss Co., Ltd.). Each optical transmission loss was measured by the cutback technique while using a He-Ne laser beam (wavelength: 633 nm).

#### Example 1

5

10

15

20

25

30

35

40

45

50

55

Synthesis of 2,5-bis(phenylthio)thiophene

[0102] 2,5-Dibrombthiophene (12.10 g, 0.050 mol), thiophenol (12.12 g, 0.110 mol) and copper(l) oxide (3.58 g, 0.025 mol) were placed in pyridine/quinoline (1/4, 100 mL), and then refluxed at 160°C for 42 hours. The reaction mixture was treated with 6N hydrochloric acid, and then extracted with toluene. The organic layer was taken out, and the solvent was eliminated by an evaporator to obtain a pale yellow liquid. The thus-obtained liquid was recrystallized from ethanol to afford the target compound. Yield: 10.1 g (67.0%). Melting point: 47-48°C.

#### Example 2

Synthesis of 4,4'-bis(phenylthio)biphenyl

[0103] 4,4'-Dibromobiphenyl (12.50 g, 0.040 mol), thiophenol (9.70 g, 0.088 mol) and KOH (4.94 g, 0.088 mol) were placed in DMI (100 mL), and then reacted at 160°C for 62 hours. After the reaction mixture was extracted with toluene, the solvent was eliminated to obtain a white solid. Using toluene/hexane (2/8) as a developing solvent, the white solid was purified by column chromatography to obtain a white solid. The white solid was recrystallized from IPA/ethyl acetate (9/1) to afford the target compound as a glossy, leaf-shaped, white solid. Yield: 11.5 g (78.0%). Melting point: 117.7°C.

### Example 3

### Synthesis of 1,4-bis(phenylthio)benzene

[0104] p-Dibromobenzene (11.80 g, 0.050 mol), thiophenol (13.22 g, 0.120 mol) and KOH (6.73 g, 0.120 mol) were placed in DMI (100 mL), and then reacted at 160°C for 57 hours. After the reaction mixture was extracted with toluene, the solvent was eliminated to obtain a white solid. Using toluene/hexane (1/9) as a developing solvent, the white solid was purified by column chromatography to obtain a pale yellow solid. The pale yellow solid was recrystallized from ethanol to afford the target compound as a glossy, leaf-shaped, white solid. Yield: 7.18 g (49.0%). Melting point: 80-81°C.

#### Example 4

5

15

#### 10 Synthesis of 1,3,5-tris(phenylthio)benzene

[0105] 1,3,5-Tribromobenzene (15.40 g, 0.0489 mol), thiophenol (16.43 g, 0.149 mol) and copper(I) oxide (3.56 g, 0.025 mol) were placed in pyridine/quinoline (1/4, 100 mL), and then refluxed at 160°C for 57 hours. The reaction mixture (solid) was dissolved in toluene, followed by washing with water. The resultant mixture was washed with 6N hydrochloric acid, and the toluene layer was taken out. The solvent was eliminated to obtain a pale yellow liquid. Using toluene/hexane (2/8) as a developer, column chromatography was performed to afford the target compound as a white solid. Yield: 13.0 g (66.0%). Melting point: 40-41°C.

#### 35 Example 5

40

45

# Synthesis of 2,5'-bis(phenylthio)bithiophene

[0106] 5,5'-Dibromo-2,2'-dithiophene (4.86 g, 0.015 mol), thiophenol (6.78 g, 0.062 mol), potassium hydroxide (4.04 g, 0.072 mol) and anhydrous DMI (50 mL) were charged into a 4-necked flask fitted with a stirrer, a thermometer and a Dimroth condenser, and then refluxed at a reaction temperature of 130°C for 13 hours and 30 minutes and further at a reaction temperature of 160°C for 6 hours and 30 minutes. Water (500 g) was added to the reaction mixture, followed by stirring. Further, toluene was added, followed by stirring. The resultant reaction mixture was allowed to separate into layers. The organic layer was washed with a saturated aqueous solution of NaCl, and then dehydrated over anhydrous magnesium sulfate. Toluene was distilled off to obtain a pale yellow solid. The solid was recrystallized and purified from IPA to afford the target compound as pale yellow needles. Yield: 5.23 g (91.1%). Melting point: 110-112°C.

#### Example 6

Synthesis of 4,6-bis(phenylthio)pyrimidine

[0107] 4,6-Dichloropyrimidine (7.45 g, 0.050 mol), thiophenol (22.12 g, 0.201 mol), potassium hydroxide (11.32 g, 0.202 mol) and anhydrous DMI (80 mL) were charged into a 4-necked flask fitted with a stirrer, a thermometer and a Dimroth condenser, and then refluxed at a reaction temperature of 130°C for 1 hour and 30 minutes and further at a reaction temperature of 150°C for 4 hours and 30 minutes. Water (1,000 g) was added to the reaction mixture, followed by stirring. Further, ethyl acetate was added, followed by stirring. The resultant reaction mixture was allowed to separate into layers. The organic layer was washed with a saturated aqueous solution of NaCl, and then dehydrated over anhydrous magnesium sulfate. Ethyl acetate was distilled off to obtain a brown mixture of a solid and a liquid. Using toluene/ethyl acetate (8/2), the liquid was purified by column chromatography to obtain a yellow solid. This solid and the above solid were recrystallized and purified from IPA to afford the target compound as pale yellow crystals. Yield: 7.75 g (52.3%). Melting point: 117°C.

20

25

30

35

5

10

#### Example 7

#### Synthesis of 1,3,5-tris(phenylthio)triazine


[0108] Thiophenol (16.58 g, 0.150 mol), potassium hydroxide (9.90 g, 0.176 mol) and anhydrous DMI (80 mL) were charged into a 4-necked flask fitted with a stirrer, a thermometer and a Dimroth condenser, and then heated at a reaction temperature of 80°C for 2 hours. Cyanuric chloride (9.22 g, 0.050 mol) was added, followed by refluxing at a reaction temperature of 120°C for 3 hours and then at a reaction temperature of 140°C for 9 hours. Water was added to the reaction mixture, followed by stirring. Further, ethyl accetate was added, followed by stirring. The resultant reaction mixture was allowed to separate into layers. The organic layer was washed with a saturated aqueous solution of NaCl, and then dehydrated over anhydrous magnesium sulfate. Ethyl acetate was distilled off to obtain a yellow viscous liquid. Using toluene/hexane (6/4), the liquid was purified by column chromatography to obtain a yellow viscous liquid. (The liquid was left over for crystallization.) The thus-obtained solid was recrystallized and purified from IPA to afford the target compound as white needles. Yield: 8.79 g (43.3%). Melting point: 97-99°C.

### 40

45

# 50

55



#### [Measurement of Refractive Indexes]

#### Example 8

[0109] Refractive indexes of spin-coated films, which had been formed from compositions with the 1,3,5-tris(phe-

nylthio)benzene of Example 4 dispersed at varied concentrations in PMMA, were measured by the prism coupler method. The results are plotted in FIG. 1. By extrapolation of the straight line, 1,3,5-tris(phenylthio)benzene was found to have a refractive index (n) of 1.702.

### 5 Comparative Example 1

[0110] Refractive indexes of spin-coated films, which had been formed from compositions with diphenyl sulfide dispersed at varied concentrations in PMMA, were measured in a similar manner as in Example 8. The results are plotted in FIG. 1. By extrapolation, diphenyl sulfide was found to have a refractive index (n) of 1.615.

#### Examples 9-14

10

15

55

**[0111]** In a similar manner as in Example 8, dopant concentration dependencies of refractive indexes were measured, and straight lines were extrapolated to calculate the refractive indexes of certain invention compounds. The results are shown below in Table 1. All the compounds were found to be higher in refractive index than diphenyl sulfide.

Table 1

20		Table 1			
		Molecular structure			Refractive index* (extra-
25	·	Morecular Strastars			polated value)
30	Ex 9	$\langle \rangle_{s} \langle \rangle_{s} \langle \rangle$	(Ex.	1)	1.690
30	Ex 10		(Ex.	2)	1.723
35	Ex 11	s-(s)	(Ex.	3)	1.700
40 .	Ex 12		(Ex.	5)	1.738
	Ex 13		(Ex.	6)	1.672
50	Ex 14	S N	(Ex.	7)	1.698

\* Film dispersed in PMMA

[Measurement of Glass transition temperatures]

Example 15

[0112] Glass transition temperatures of films, which had been formed from compositions with the 1,3,5-tris(phenylth-io)benzene of Example 4 dispersed at varied concentrations in PMMA, were measured. The results of plotting of the thus-measured glass transition temperatures against the corresponding refractive indexes are shown in FIG. 2.

Comparative Example 2

10

20

25

[0113] Glass transition temperatures of films, which had been formed from compositions with diphenyl sulfide dispersed at varied concentrations in PMMA, were measured in a similar manner as in Example 15. The results are plotted in FIG. 2.

15 [Optical Parts]

Example 16

[0114] A horizontally-held glass tube of 500 mm in length and 18 mm in inner diameter was filled with methyl methacrylate (MMA) (112 g), benzoyl peroxide (0.56 g) as a polymerization initiator and n-butylmercaptan (350 µL) as a chain transfer agent. After the glass tube was sealed at opposite ends thereof, the glass tube was heated at 70°C for 20 hours while rotating it at 3,000 rpm. The rotation was then stopped, and the glass tube was heated at 90°C for 10 hours to polymerize the MMA so that a polymerization tube formed of methyl methacrylate (PMMA) was prepared. A hollow part of 5 mm in diameter was centrally formed through the polymer rod to obtain a hollow tube.

[0115] The PMMA-made hollow tube was sealed at an end thereof, and then filled with MMA (48 g), the below-described dopant of high refractive index (12 g), di-t-butyl peroxide (54  $\mu$ L) as a polymerization initiator and n-lauryl mercaptan (160  $\mu$ L) as a chain transfer agent. After the opposite end was sealed, the tube was held horizontally. While rotating the tube at 10 rpm, the tube was heated at 95°C for 24 hours. The rotation was then stopped, and the tube was heated at 110°C for 48 hours to polymerize the MMA so that a rod of 18 mm in outer diameter was obtained.

30

35

40

45

55

[0116] The rod was mounted upright on a rod feeder and, while heating and melting the rod in a cylindrical heating furnace controlled at 220°C, was drawn and taken up at a constant speed so that the rod was melt spun to obtain an optical fiber of 0.75 mm in diameter. The refractive index distribution of a section of the thus-obtained optical fiber was measured. The refractive index was found to continuously decrease from a central part toward an outer periphery. Transmission characteristics of the thus-obtained optical fiber over a length of 100 m were evaluated. Its transmission loss was 17.8 dB at a wavelength of 650 nm, while its transmission band was 3.4 GHz. The optical fiber, therefore, had good performance as POF with distributed refractive index. Further, the thus-obtained optical fiber was placed in an oven controlled at 85°C and a heating test was conducted. The refractive index distribution after 3,000 hours was measured. The optical fiber was found to still retain the initial refractive index distribution.

50 Example 17

[0117] A PMMA-made hollow tube prepared in a similar manner as in Example 16 was provided. The PMMA-made hollow tube was filled with MMA (48 g), the below-described dopant of high refractive index (12 g), di-t-butyl peroxide (54  $\mu$ L) as a polymerization initiator and n-lauryl mercaptan (160  $\mu$ L) as a chain transfer agent. After the opposite end was sealed, the tube was held horizontally. While rotating the tube at 10 rpm, the tube was heated at 95°C for 24 hours. The rotation was then stopped, and the tube was heated at 110°C for 48 hours to polymerize the MMA so that a rod of 18 mm in outer diameter was obtained.

[0118] The rod was mounted upright on a rod feeder and, while heating and melting the rod in a cylindrical heating furnace controlled at 220°C, was drawn and taken up at a constant speed so that the rod was melt spun to obtain an optical fiber of 0.75 mm in diameter. The refractive index distribution of a section of the thus-obtained optical fiber was measured. The refractive index was found to gradually decrease from a central part toward an outer periphery. Transmission characteristics of the thus-obtained optical fiber over a length of 100 m were evaluated. Its transmission loss was 15.3 dB at a wavelength of 650 nm, while its transmission band was 3.1 GHz. The optical fiber, therefore, had good performance as a plastic optical fiber with distributed refractive index. Further, the thus-obtained optical fiber was placed in an oven controlled at 85°C and a heating test was conducted. The refractive index distribution after 3,000 hours was measured. The optical fiber was found to still retain the initial refractive index distribution.

#### Example 18

5

10

15

20

25

30

40

45

50

[0119] A PMMA-made hollow tube prepared in a similar manner as in Example 16 was provided. The PMMA-made hollow tube was filled with MMA (48 g), the below-described dopant of high refractive index (12 g), di-t-butyl peroxide (54 μL) as a polymerization initiator and n-lauryl mercaptan (160 μL) as a chain transfer agent. After the opposite end was sealed, the tube was held horizontally. While rotating the tube at 10 rpm, the tube was heated at 95°C for 24 hours. The rotation was then stopped, and the tube was heated at 110°C for 48 hours to polymerize the MMA so that a rod of 17.6 mm in outer diameter was obtained.

35 [0120] The rod was mounted upright on a rod feeder and, while heating and melting the rod in a cylindrical heating furnace controlled at 220°C, was drawn and taken up at a constant speed so that the rod was melt spun to obtain an optical fiber of 0.75 mm in diameter. The refractive index distribution of a section of the thus-obtained optical fiber was measured. The refractive index was found to gradually decrease from a central part toward an outer periphery. Transmission characteristics of the thus-obtained optical fiber over a length of 100 m were evaluated. Its transmission loss was 14.5 dB at a wavelength of 650 nm, while its transmission band was 2.3 GHz. The optical fiber, therefore, had good performance as a plastic optical fiber with distributed refractive index. Further, the thus-obtained optical fiber was placed in an oven controlled at 85°C and a heating test was conducted. The refractive index distribution after 3,000 hours was measured. The optical fiber was found to still retain the initial refractive index distribution.


### Example 19

[0121] A PMMA-made hollow tube prepared in a similar manner as in Example 16 was provided. The PMMA-made hollow tube was filled with MMA (48 g), the below-described dopant of high refractive index (12 g), di-t-butyl peroxide (54 μL) as a polymerization initiator and n-lauryl mercaptan (160 μL) as a chain transfer agent. After the opposite end was sealed, the tube was held horizontally. While rotating the tube at 10 rpm, the tube was heated at 95°C for 24 hours. The rotation was then stopped, and the tube was heated at 110°C for 48 hours to polymerize the MMA so that a rod of 18 mm in outer diameter was obtained.

[0122] The rod was mounted upright on a rod feeder and, while heating and melting the rod in a cylindrical heating furnace controlled at 220°C, was drawn and taken up at a constant speed so that the rod was melt spun to obtain an optical fiber of 0.75 mm in diameter. The refractive index distribution of a section of the thus-obtained optical fiber was measured. The refractive index was found to continuously decrease from a central part toward an outer periphery. Transmission characteristics of the thus-obtained optical fiber over a length of 100 m were evaluated. Its transmission loss was 17.8 dB at a wavelength of 650 nm, while its transmission band was 3.5 GHz. The optical fiber, therefore, had good performance as POP with distributed refractive index. Further, the thus-obtained optical fiber was placed in an oven controlled at 85°C and a heating test was conducted. The refractive index distribution after 3,000 hours was measured. The optical fiber was found to still retain the initial refractive index distribution.

#### Example 20

[0123] A PMMA-made hollow tube prepared in a similar manner as in Example 16 was provided. The PMMA-made hollow tube was filled with MMA (48 g), the below-described dopant of high refractive index (12 g), di-t-butyl peroxide (54  $\mu$ L) as a polymerization initiator and n-lauryl mercaptan (160  $\mu$ L) as a chain transfer agent. After the opposite end was sealed, the tube was held horizontally. While rotating the tube at 10 rpm, the tube was heated at 95°C for 24 hours. The rotation was then stopped, and the tube was heated at 110°C for 48 hours to polymerize the MMA so that a rod of 18 mm in outer diameter was obtained.



[0124] The rod was mounted upright on a rod feeder and, while heating and melting the rod in a cylindrical heating furnace controlled at 220°C, was drawn and taken up at a constant speed so that the rod was melt spun to obtain an optical fiber of 0.75 mm in diameter. The refractive index distribution of a section of the thus-obtained optical fiber was measured. The refractive index was found to gradually decrease from a central part toward an outer periphery. Transmission characteristics of the thus-obtained optical fiber over a length of 100 m were evaluated. Its transmission loss was 16.2 dB at a wavelength of 650 nm, while its transmission band was 3.1 GHz. The optical fiber, therefore, had good performance as a plastic optical fiber with distributed refractive index. Further, the thus-obtained optical fiber was placed in an oven controlled at 85°C and a heating test was conducted. The refractive index distribution after 3,000

hours was measured. The optical fiber was found to still retain the initial refractive index distribution.

Example 21

5

10

20

25

30

35

40

45

[0125] The 2,5-bis(phenylthio)thiophene of Example 1 was added at 20 wt.% to PMMA, and they were mixed for 10 minutes in a mortar. The sample was formed into a film by a hot press, and its optical properties were measured. The film so obtained was found to have a whole light transmittance of 91%, a hue of 3.5, nd of 1.5187, and an Abbe number of 46.7. 2.5-Bis(phenylthio)thiophene was, therefore, found to increase the refractive index of PMMA without substantially changing the transmittance and hue of PMMA alone.

INDUSTRIAL APPLICABILITY

[0126] The optical materials according to the present invention can bring about high refractive indexes more efficiently than the dopants known to date. They have smaller plasticizing effect and are excellent in heat' resistance, so that they are equipped with improved reliability as optical materials.

**[0127]** Further, GI POF, one of optical parts according to the present invention, is excellent in refractive index distribution and heat resistant stability compared with conventional GI POFs, and is equipped with transmission characteristics of improved reliability as a optical fiber. Accordingly, POFs according to the present invention can also be used over an extended period of time in fields where heat resistance is required, such as automobile engine compartments and the like.

#### Claims

1. An optical material comprising at least one aromatic sulfide compound represented by the following formula (1):

 $A - \left( -S - B^{k} \right)_{n} \tag{1}$ 

wherein

n stands for an integer of from 2 to 12,

k stands for an integer of from 1 to n,

A represents a substituted or unsubstituted, n-valent carbocyclic aromatic ring or heterocyclic aromatic ring, and

B<sup>1</sup> to B<sup>n</sup> each independently represent a substituted or unsubstituted, carbocyclic aromatic group or heterocyclic aromatic group.

- 2. An optical material according to claim 1, wherein in formula (1), n stands for an integer of from 2 to 4, and A is a substituted or unsubstituted, heterocyclic aromatic ring.
- 3. An optical material according to claim 2, wherein in formula (1), B¹ to Bn each independently area substituted or unsubstituted phenyl group, a substituted or unsubstituted pyrimidyl group, a substituted or unsubstituted naphthyl group, a substituted or unsubstituted thienyl group, a substituted or unsubstituted benzothiazolyl group, a substituted or unsubstituted benzoxazolyl group, a substituted or unsubstituted thiadiazolyl group, or a substituted or unsubstituted thiazolyl group.
- 4. An optical material according to claim 2, wherein in formula (1), A is a divalent heterocyclic aromatic ring selected from a substituted or unsubstituted thiophene ring, a substituted or unsubstituted thiophene-1,1-dioxide ring, a substituted or unsubstituted thiophene ring, a substituted or unsubstituted thiophene ring, a substituted or unsubstituted triazine ring, or a substituted or unsubstituted pyrimidine ring.
- 5. An optical material according to claim 4, wherein in formula (1), B¹ to Bⁿ each independently are a substituted or unsubstituted phenyl group, a substituted or unsubstituted pyrimidyl group, a substituted or unsubstituted naphthyl group, a substituted or unsubstituted thienyl group, a substituted or unsubstituted benzothiazolyl group, a substituted or unsubstituted benzothiazolyl group, or a substituted or unsubstituted thiadiazolyl group, or a substituted or unsubstituted thiadiazolyl group, or a substituted or unsubstituted benzothiazolyl group, or a substituted or unsubstituted thiadiazolyl group, or a substituted or unsubstituted thiadiazolyl group, or a substituted or unsubstituted benzothiazolyl group, or a substituted or unsubstituted thiadiazolyl group, or a substituted or unsubstituted benzothiazolyl group, a substituted or unsubstituted benzothiazolyl group, or a substituted or unsubstituted benzothiazolyl group, a substituted benzot

unsubstituted thiazolyl group.

5

10

15

20

45

- **6.** An optical material according to claim 2, wherein in formula (1), A is a trivalent heterocyclic aromatic ring selected from a substituted or unsubstituted thiophene ring, a substituted or unsubstituted triazine ring, or a substituted or unsubstituted pyrimidine ring.
- 7. An optical material according to claim 6, wherein in formula (1), B¹ to Bⁿ each independently are a substituted or unsubstituted phenyl group, a substituted or unsubstituted pyrimidyl group, a substituted or unsubstituted naphthyl group, a substituted or unsubstituted thienyl group, a substituted or unsubstituted benzothiazolyl group, a substituted or unsubstituted benzoxazolyl group, a substituted or unsubstituted thiazolyl group, or a substituted or unsubstituted thiazolyl group.
- 8. An optical material according to claim 2, wherein in formula (1), A is a tetravalent heterocyclic aromatic ring selected from a substituted or unsubstituted thiophene ring or a substituted or unsubstituted thiophene ring.
- 9. An optical material according to claim 8, wherein in formula (1), B¹ to B¹ each independently are a substituted or unsubstituted phenyl group, a substituted or unsubstituted pyrimidyl group, a substituted or unsubstituted naphthyl group, a substituted or unsubstituted thienyl group, a substituted or unsubstituted benzothiazolyl group, a substituted or unsubstituted benzoxazolyl group, a substituted or unsubstituted thiazolyl group, or a substituted or unsubstituted thiazolyl group.
- 10. An optical material according to claim 1, wherein in formula (1), n stands for an integer of from 2 to 6, and A is a substituted or unsubstituted, carbocyclic aromatic ring.
- 25 11. An optical material according to claim 10, wherein in formula (1), B¹ to Bn each independently are a substituted or unsubstituted phenyl group, a substituted or unsubstituted pyrimidyl group, a substituted or unsubstituted naphthyl group, a substituted or unsubstituted thienyl group, a substituted or unsubstituted benzothiazolyl group, a substituted or unsubstituted benzoxazolyl group, a substituted or unsubstituted thiadiazolyl group, or a substituted or unsubstituted thiazolyl group.
  30
  - 12. An optical material according to claim 10, wherein in formula (1), A is a divalent carbocyclic aromatic ring selected from a substituted or unsubstituted benzene ring, a substituted or unsubstituted naphthalene ring, a substituted or unsubstituted fluorene ring, or a substituted or unsubstituted biphenyl group.
- 35 13. An optical material according to claim 12, wherein in formula (1), B¹ to Bn each independently are a substituted or unsubstituted phenyl group, a substituted or unsubstituted pyrimidyl group, a substituted or unsubstituted naphthyl group, a substituted or unsubstituted thienyl group, a substituted or unsubstituted benzothiazolyl group, a substituted or unsubstituted benzoxazolyl group, a substituted or unsubstituted thiadiazolyl group, or a substituted or unsubstituted thiadiazolyl group.
  - **14.** An optical material according to claim 10, wherein in formula (1), A is a trivalent carbocyclic aromatic ring selected from a substituted or unsubstituted benzene ring or a substituted or unsubstituted fluorene ring.
  - **15.** An optical material according to claim 14, wherein in formula (1), B<sup>1</sup> to B<sup>n</sup> each independently are a substituted or unsubstituted phenyl group, a substituted or unsubstituted pyrimidyl group, a substituted or unsubstituted naphthyl group, a substituted or unsubstituted thienyl group, a substituted or unsubstituted benzoxiazolyl group, a substituted or unsubstituted benzoxiazolyl group, a substituted or unsubstituted thiazolyl group, or a substituted or unsubstituted thiazolyl group.
- 50 **16.** An optical material according to claim 10, wherein in formula (1), A is a tetravalent carbocyclic aromatic ring selected from a substituted or unsubstituted benzene ring or a substituted or unsubstituted biphenyl group.
- 17. An optical material according to claim 16, wherein in formula (1), B¹ to Bⁿ each independently is a substituted or unsubstituted phenyl group, a substituted or unsubstituted pyrimidyl group, a substituted or unsubstituted naphthyl group, a substituted or unsubstituted or unsubstituted benzothiazolyl group, a substituted or unsubstituted benzothiazolyl group, or a substituted or unsubstituted thiazolyl group.

- 18. An optical material according to claims 1 to 17, which is a polymer optical fiber material.
- 19. An optical part comprising a polymer optical fiber material according to claim 18.
- 20. An optical part according to claim 19, which is a GI polymer optical fiber.
  - 21. An aromatic sulfide compound represented by the following formula (1a):

 $A - \left( -S - B^{k} \right)_{2} \tag{1a}$ 

wherein

5

10

15

20

25

30

35

40

45

50

55

k stands for an integer of from 1 to 2,

A represents a divalent carbocyclic aromatic ring or heterocyclic aromatic ring selected from a substituted or unsubstituted benzene ring, a substituted or unsubstituted naphthalene ring, a substituted or unsubstituted fluorene ring, a substituted or unsubstituted biphenyl ring, a substituted or unsubstituted thiophene ring, a substituted or unsubstituted thiophene-1,1-dioxide ring, a substituted or unsubstituted thiophene-1,1-dioxide ring, a substituted or unsubstituted triazine ring, or a substituted or unsubstituted pyrimidine ring, and

B¹ to Bn each independently represent a carbocyclic aromatic group or heterocyclic aromatic group selected from a substituted or unsubstituted phenyl group, a substituted or unsubstituted pyrimidyl group, a substituted or unsubstituted pyrimidyl group, a substituted or unsubstituted benzothiazolyl group, a substituted or unsubstituted benzoxazolyl group, a substituted or unsubstituted benzoxazolyl group, a substituted or unsubstituted thiazolyl group, or a substituted or unsubstituted thiazolyl group.

22. An aromatic sulfide compound represented by the following formula (1b):

 $A - \left( -S - B^{k} \right)_{3} \tag{1b}$ 

wherein

k stands for an integer of from 1 to 3,

A represents a trivalent carbocyclic aromatic ring or heterocyclic aromatic ring selected from a substituted or unsubstituted benzene ring, a substituted or unsubstituted fluorene ring, a substituted or unsubstituted triazine ring, or a substituted or unsubstituted pyrimidine ring, and

B<sup>1</sup>, B<sup>2</sup> and B<sup>3</sup> each independently represent a carbocyclic aromatic group or heterocyclic aromatic group selected from a substituted or unsubstituted phenyl group, a substituted or unsubstituted pyrimidyl group, a substituted or unsubstituted naphthyl group, a substituted or unsubstituted thienyl group, a substituted or unsubstituted benzothiazolyl group, a substituted or unsubstituted benzoxazolyl group, a substituted or unsubstituted thiazolyl group, or a substituted or unsubstituted thiazolyl group.

23. An aromatic sulfide compound represented by the following formula (1c):

 $A - \left( -S - B^{k} \right)_{4}$  (1c)

wherein


k stands for an integer of from 1 to 4,

A represents a carbocyclic aromatic ring or heterocyclic aromatic ring selected from a substituted or unsubstituted benzene ring, a substituted or unsubstituted biphenyl ring, a substituted or unsubstituted thiophene ring, a substituted or unsubstituted thiophene ring, and


 $B^1, B^2, B^3 \ and \ B^4 \ each \ independently \ represent \ a \ carbocyclic \ aromatic \ group \ or \ heterocyclic \ aromatic \ group$ 

5	selected from a substituted or unsubstituted phenyl group, a substituted or unsubstituted pyrimidyl group, a substituted or unsubstituted naphthyl group, a substituted or unsubstituted or unsubstituted or unsubstituted or unsubstituted benzothiazolyl group, a substituted or unsubstituted benzoxazolyl group, a substituted thiadiazolyl group, or a substituted or unsubstituted thiazolyl group.
10	
15	
20	
25	
30	
35	
40	
45	
50	
55	

FIG. 1

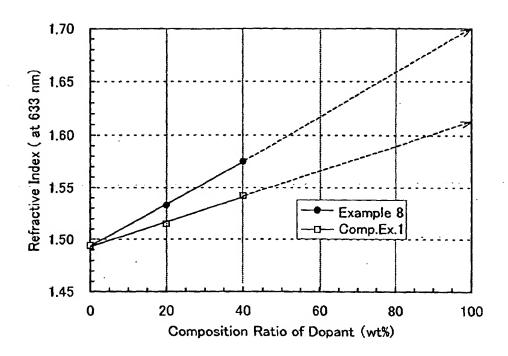



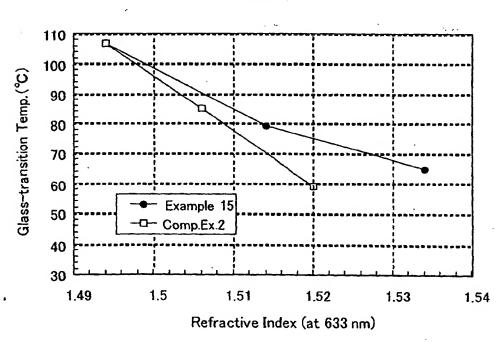

# INTERNATIONAL SEARCH REPORT

International application No.

PCT/JP01/04491

			<u> </u>			
A. CLASSIFICATION OF SUBJECT MATTER Int.Cl <sup>7</sup> G02B1/04, 6/00, C07C321/24, 323/09, C07D239/38, 263/58, 333/34, 277/74, 285/12, 277/36, 417/14, 409/14, 413/4, 333/408, 513/04, 251/16, 403/14, 307/64, 405/14 According to International Patent Classification (IPC) or to both national classification and IPC						
B. FIELDS SEARCHED						
Minimum documentations Int.Cl <sup>7</sup> G02 263 333	Minimum documentation searched (classification system followed by classification symbols)  Int.Cl <sup>7</sup> G02B1/04, 6/00, C07C321/24, 323/09, C07D239/38,  263/58, 333/34, 277/74, 285/12, 277/36, 417/14, 409/14, 413/04,  333/48, 513/D4, 251/16, 403/14, 307/64, 405/14					
Jitsuyo Shina Kokai Jitsuyo	n Koho 1926-1996 Shinan Koho 1971-2001	Toroku Ji Jitsuyo S	ocuments are included in the fields searched tsuyo Shinan Koho 1994-2001 Shinan Toroku Koho 1996-2001			
	ited during the international search (nam	e of data base and,	where practicable, search terms used)			
C. DOCUMENTS CONS	SIDERED TO BE RELEVANT					
[	of document, with indication, where ap		elevant passages Relevant to claim No.			
X						
	e listed in the continuation of Box C.		family annex.			
Special categories of cited documents:  "A" document defining the general state of the art which is not considered to be of particular relevance earlier document but published on or after the international filing date  "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)  "O" document referring to an oral disclosure, use, exhibition or other means  "P" document published prior to the international filing date but later		"X" date understand the document of considered in step when the document of considered to combined with the combination combination.	priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art			
than the priority date cla Date of the actual completi		Date of mailing o	of the international search report			
Name and mailing address Japanese Pate		Authorized office	er			
Facsimile No.		Telephone No.				

Form PCT/ISA/210 (second sheet) (July 1992)

# INTERNATIONAL SEARCH REPORT

International application No.

PCT/JP01/04491

Box 1	Observations where certain claims were found unsearchable (Continuation of item 1 of first sheet)
This inte	ernational search report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:
1.	Claims Nos.: because they relate to subject matter not required to be searched by this Authority, namely:
2.	Claims Nos.: because they relate to parts of the international application that do not comply with the prescribed requirements to such an extent that no meaningful international search can be carried out, specifically:
3.	Claims Nos.: because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a).
Box II	Observations where unity of invention is lacking (Continuation of item 2 of first sheet)
This Inte	ernational Searching Authority found multiple inventions in this international application, as follows:
Se	ee the extra sheet,
1.	As all required additional search fees were timely paid by the applicant, this international search report covers all searchable claims.
2.	As all searchable claims could be searched without effort justifying an additional fee, this Authority did not invite payment of any additional fee.
3.	As only some of the required additional search fees were timely paid by the applicant, this international search report covers only those claims for which fees were paid, specifically claims Nos.:
• •	
4. 🛚	No required additional search fees were timely paid by the applicant. Consequently, this international search report is restricted to the invention first mentioned in the claims; it is covered by claims Nos.:
Cl	laims 1-3 and 18-20
Remark	on Protest The additional search fees were accompanied by the applicant's protest.
	No protest accompanied the payment of additional search fees.

Form PCT/ISA/210 (continuation of first sheet (1)) (July 1992)

#### INTERNATIONAL SEARCH REPORT

International application No.

PCT/JP01/04491

Continuation of A of second sheet C07D495/04,417/12,409/12,413/12,C08J5/00 //(C07D513/04,285:04,333:06)(C07D495/04,333:06),C08L101:00

Continuation of B of second sheet
C07D495/04,417/12,409/12,413/12,C08J5/00
//(C07D513/04,285:04,333:06)(C07D495/04,333:06),C08L101:00

#### Continuation of Box No. II of continuation of first sheet (1)

The aromatic sulfide compound represented by the general formula (1) and the incorporation thereof in an optical material, which are disclosed in claims 1, 2, and 10, are a conventionally known technical matter as described in JP, 11-167030, A (Asahi Glass Co., Ltd.), 22 June, 1999 (22.06.99). This technical matter cannot hence be said to be a special technical feature.

Consequently, the subject matters of claims 3, 4, 5, 6, 8, 11, 12, 14, 16, 21, 22, and 23, which are linked to each other so as to have the technical matter as a common part, do not have a matter common thereto which can be regarded as a special technical feature in the sense of Rule 13.2 of the Regulations under the PCT.

Therefore, the number of inventions disclosed in the claims is 12, i.e., claims 1-3 and 18-20, claim 4, claim 5, claims 6 and 7, claims 8 and 9, claims 10 and 11, claims 12 and 13, claims 14 and 15, claims 16 and 17, claim 21, claim 22, and claim 23.

Form PCT/ISA/210 (extra sheet) (July 1992)